


PWM module of CANopen Slave



CAN-2088C

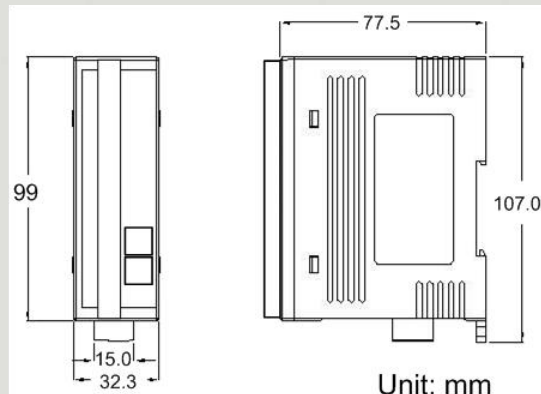


Dimensions

PWM (Pulse width modulation) is a powerful technique for controlling analog circuits. By using digital outputs, it can generate a waveform with variant duty cycle and frequency to control analog circuits. CAN-2088C, a CAN bus remote I/O modules with CANopen protocol, provides 8 PWM output channels and 8 digital inputs channels with high-speed counter function. It can be used to develop practical and economical analog control systems in the CANopen network.

Features

- Hardware-controlled PWM output
- PWM output frequency: 0.2 Hz ~ 500 kHz with 0.1%~99.9% duty cycle
- PWM Output Modes: software trigger / hardware trigger
- Trigger each PWM output individually or all PWM outputs synchronously
- Support Burst output mode and Continue output mode
- Provide 32-bit 500 kHz high-speed counter for each DI channel
- Pass the validation of CANopen conformance test
- Provide EDS file for CANopen master interface

Internal I/O Structure

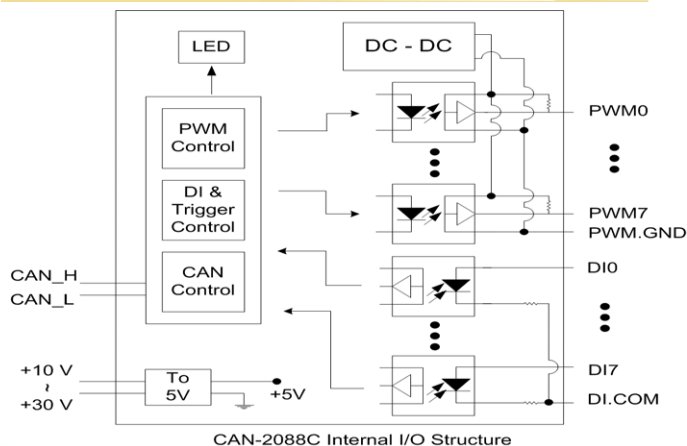

I/O Pin & Wire Connection

Terminal No.	Pin Assignment	Output Type	ON State LED ON Readback as 1	OFF State LED OFF Readback as 0
01	PO.0	Drive Relay	Relay On	Relay Off
02	PO.1		Relay On	Relay Off
03	PO.2	Resistance Load	Relay On	Relay Off
04	PO.3		Relay On	Relay Off
05	PO.4	Resistance Load	Relay On	Relay Off
06	PO.5		Relay On	Relay Off
07	PO.6	Resistance Load	Relay On	Relay Off
08	PO.7		Relay On	Relay Off
09	PO.GND	Resistance Load	Relay On	Relay Off
10	PO.GND		Relay On	Relay Off
11	DI.0	Relay Contact	Relay On	Relay Off
12	DI.1		Relay On	Relay Off
13	DI.2	TTL/CMOS Logic	Relay On	Relay Off
14	DI.3		Relay On	Relay Off
15	DI.4	NPN Output	Relay On	Relay Off
16	DI.5		Relay On	Relay Off
17	DI.6	PNP Output	Relay On	Relay Off
18	DI.7		Relay On	Relay Off
19	DI.GND	PNP Output	Relay On	Relay Off
20	DI.GND		Relay On	Relay Off

CAN Pin & Baud Rate Rotary

CAN_V+ Pin 5
CAN_H Pin 4
CAN_Shield Pin 3
CAN_L Pin 2
CAN_GND Pin 1




Baud rate rotary switch

Switch Value	Baud Rate
0	10 kbps
1	20 kbps
2	50 kbps
3	125 kbps
4	250 kbps
5	500 kbps
6	800 kbps
7	1000 kbps

Hardware Specifications

CAN Interface	
Connector	5-pin screwed terminal block (CAN_GND, CAN_L, CAN_SHLD, CAN_H, CAN_V+)
Baud Rate (bps)	10 k, 20 k, 50 k, 125 k, 250 k, 500 k, 800 k, 1M
Terminal Resistor	Switch for 120 terminal resistor
Node ID	1~99 selected by rotary switch
Protocol	CANopen DS-301 ver4.02, DS-401 ver2.1
No. of PDOs	10 Rx, 10 Tx (support dynamic PDO)
PDO Mode	Event Triggered, Remotely requested, Cyclic and acyclic SYNC
Error Control	Node Guarding protocol and Heartbeat Producer protocol
Emergency Message	Yes
PWM Interface	
Channels	8 (Source)
Output Max. Load Current	1 mA
Frequency Range	0.2 Hz ~ 500 kHz (non-continuous, the min. unit of the high/low level signal is 1 us)
PWM Mode	Continue mode, Burst mode, Hardware trigger mode, Software trigger mode
ESD Protection	4 kV Contact for each channel
DI Interface	
Channels	8 (Sink)
Counter Frequency	32-bit, 500 kHz Max.
ESD Protection	4 kV Contact for each channel
LED	
Round LED	PWR LED, RUN LED, ERR LED
I/O LED	8 LEDs as PWM, 8 LEDs as Digital Input, and 1 LED as terminal resistor indicator
Power	
Input range	Unregulated +10 ~ +30 V _{DC}
Power Consumption	3.5 W
Mechanism	
Installation	DIN-Rail
Dimensions	32.3 mm x 99 mm x 77.5 mm (W x L x H)
Environment	
Operating Temp.	-25 ~ +75 °C
Storage Temp.	-30 ~ +80 °C
Humidity	10 ~ 90% RH, non-condensing

Applications

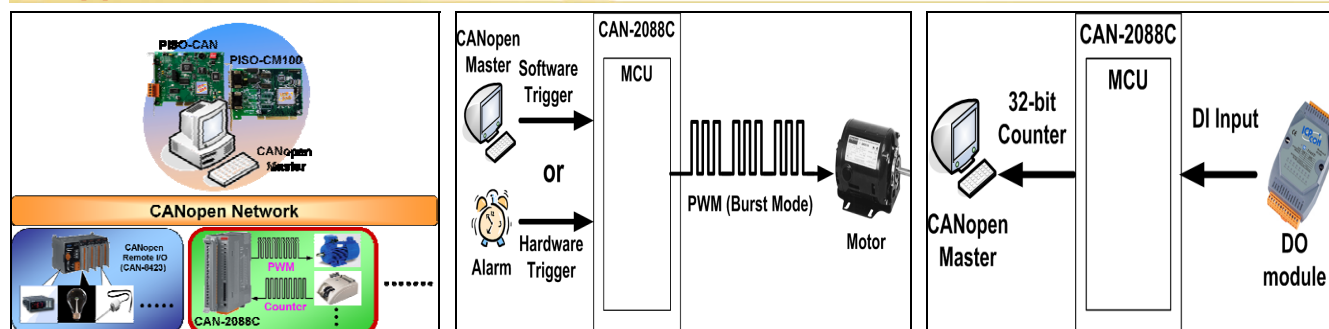

Ordering Information

CAN-2088C	CANopen Module of 8-channel PWM and 8-channel DI with High-speed Counters
------------------	---------------------------------------------------------------------------