



FRM220-1000EAS/X-1

OAM/IP Managed 10/100/1000Base-T to 100/1000Base-X SFP GbE Media Converter

The FRM220-1000EAS/X-1 is an IEEE802.3ah OAM compliant copper to fiber Gigabit Ethernet solution designed to make conversion between 10/100/1000Base-T and 100/1000Base-X with SFP. With stand-alone SNMP and Web-based management, the network administrator can monitor, configure and control the activity of each IEEE802.3ah series card and remotely connected OAM compliant converter. By offering IEEE802.3ah OAM in-band management, this converter can also be completely controlled and monitored from a centrally located managed rack. Based on a powerful L2 switch architecture, this converter supports bandwidth control, duplex and speed configuration, VLAN tagging, Q-in-Q, QoS, Spanning tree as well as auto laser shutdown, link fault pass through, OAM loop back and dying gasp.

Features


- 10/100/1000Base-T to 100/1000Base-X SFP
- Supports local / remote IEEE802.3ah OAM/ IP In-band management
- Stand-alone IP Based, Web GUI, Telnet, SNMP management
- Auto-Negotiation or forced mode
- Auto MDI/MDIX
- Supports IEEE 802.1Q Tagging
- Supports Q in Q double tagging
- Forward 10K bytes Jumbo packets (max.)
- Supports Flow control (Pause)
- Supports OAM remote loopback to assist in diagnosing network problems
- Supports remote IP ping function for diagnostic purpose
- Supports bandwidth control
- Supports remote CPE power fail detect (dying gasp)
- Supports Far End Fault Indication (FEFI)
- Supports Link Fault Pass-Through (LFPT)
- Supports RMON counter
- D/D function for supported SFP fiber transceiver
- Auto Laser Shutdown (ALS)
- Online local / remote f/w upgrade
- Default port and IEEE802.1Q Tagging priority QoS

Specifications

| | | |
|--------------------------|-------------------------------------|--|
| Optical Interface | Connector | SFP LC |
| | Data rate | 100/1000Mbps |
| | Duplex mode | Full duplex |
| | Fiber | MM 50/125µm, 62.5/125µm. SM 9/125µm |
| | Distance | MM 550m, 2km, SM 15/30/50/80/120km WDM 20/40/60km |
| Wavelength | MM | 1310nm, SM 1310, 1550nm |
| | WDM | 1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B) |
| Power Consumption | < 8W | |
| Dimensions | Card: 155 x 20.8 x 88mm (D x W x H) | |
| Weight | 120g | |

| | | |
|-----------------------------|---|---|
| Electrical Interface | Connector | RJ45 |
| | Data rate | 10Mbps, 100Mbps, 1000Mbps |
| | Duplex mode | Half / Full duplex |
| | Cable | 10Base-T Cat.3, 4, 5, UTP 100Base-TX Cat.5, 5e or higher 1000Base-T Cat.5, 5e or higher |
| Standards | IEEE 802.3, IEEE 802.3u, IEEE 802.1Q, IEEE 802.3ab, IEEE 802.3z | |
| Indications | LED : Power, FX-Link, FEF, TEST, Speed(10,100,1000), FULL | |
| Power Input | Card | : 12VDC |
| | Standalone | : AC, DC options |
| Temperature | 0 ~ 50°C (Operating), -10 ~ 70°C (Storage) | |
| Humidity | 10 ~ 90% non-condensing | |
| Certification | CE, FCC | |
| MTBF | 65,000 hrs | |

Application

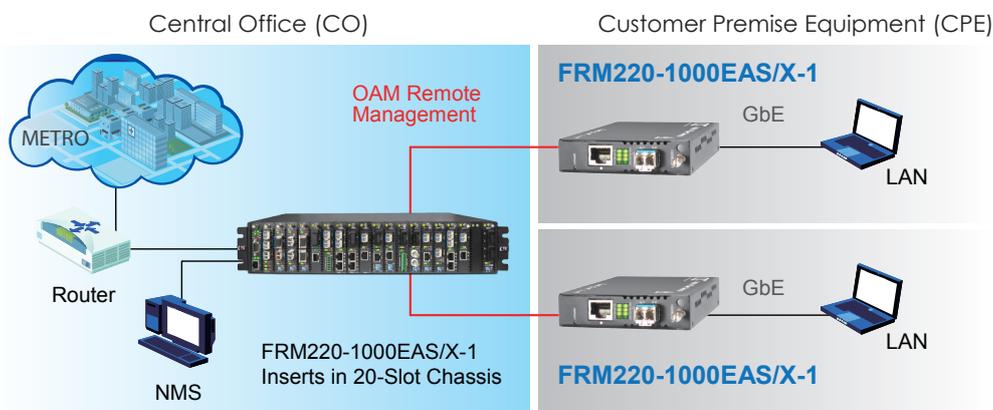

Ordering Information

| Model Name | Description |
|--------------------|---|
| FRM220-1000EAS/X-1 | 10/100/1000Base-T to 100/1000Base-X with OAM/IP-Based managed GbE Media Converter, (optional SFP) |

Note: This card may use CH01M to provide console for initial TCP/IP settings, or use CH01 with default IP.