

NPort® 5200A Series

2-port RS-232/422/485 serial device servers



- > Fast 3-step web-based configuration
- > Surge protection for serial, Ethernet, and power lines
- > COM port grouping and UDP multicast applications
- > Screw connectors for secure installation
- > Dual DC power inputs with power jack and terminal block
- > Versatile TCP and UDP operation modes



Overview

The NPort® 5200A device servers are designed to make serial devices network-ready in an instant and give your PC software direct access to serial devices from anywhere on the network. The NPort® 5200A

device servers are ultra-lean, ruggedized, and user-friendly, making simple and reliable serial-to-Ethernet solutions possible.

A Greener Serial-to-Ethernet Solution

The Moxa MiiNe is a small but powerful ARM-based serial-to-Ethernet SoC with RAM and Flash embedded. The NPort® 5200A series saves at least 50% on power consumption compared to existing solutions on the market, helping engineers meet the tough environmental

compliance challenges found in today's industrial environments.



Surge-Protected Serial, Ethernet, and Power Lines

Surge, which is typically caused by high voltages that result from switching and lightning transients, is a common threat to all electrical devices. Moxa's leading-edge surge immunity solution, which is applied to the NPort® 5200A's serial, power, and Ethernet lines, is tested and proven compliant with IEC 61000-4-5. This state-of-the-art

surge protection provides a robust serial-to-Ethernet solution that can protect electrical devices from voltage spikes and withstand electrically noisy environmental conditions.



3-step Web-Based Configuration

The NPort® 5200A's 3-step web-based configuration tool is straightforward and user-friendly. The NPort® 5200A's web console guides users through 3 simple configuration steps that are necessary to activate the serial-to-Ethernet application. With this speedy 3-step web-based configuration, a user only needs to spend an average of

30 seconds to complete the NPort® settings and enable the application, saving a great amount of time and effort.




COM Port Grouping

The NPort® 5200A's COM Grouping function allows you to create a COM Group and redirect data from it to several physical COM ports on NPort device servers. With COM Grouping, you will be able to control

multiple physical serial ports simultaneously by operating only one COM port.

Appearance

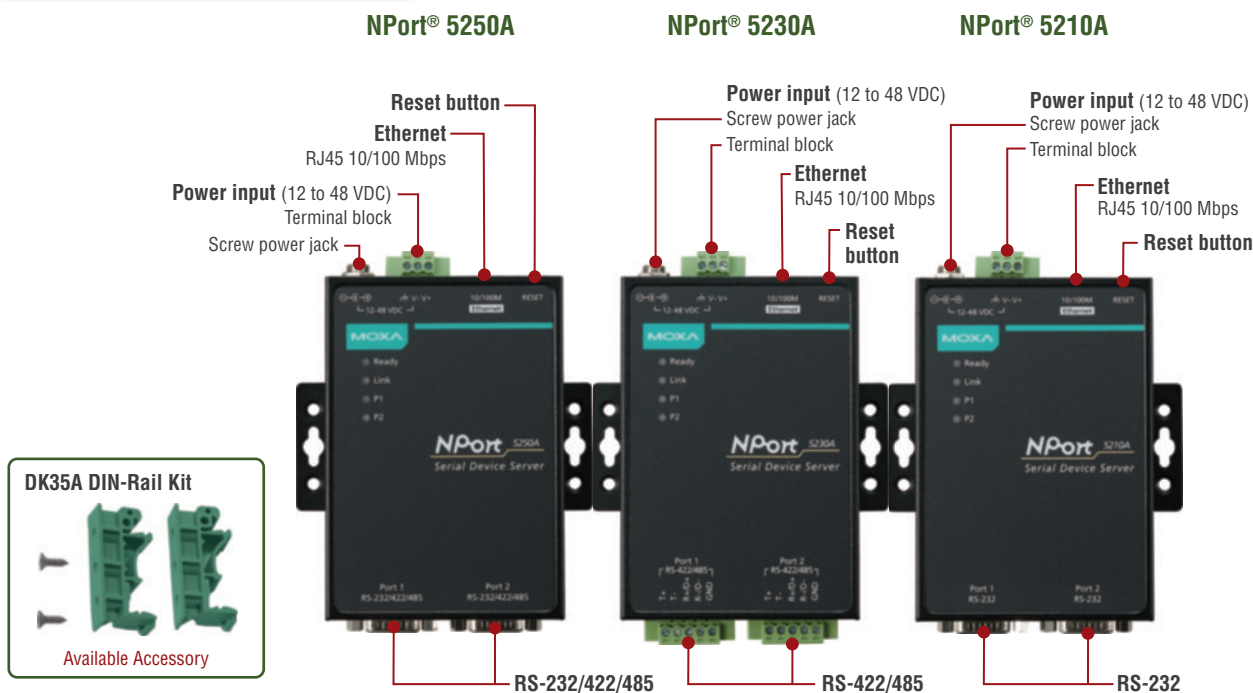

Specifications

Ethernet Interface

Number of Ports: 1

Speed: 10/100 Mbps, auto MDI/MDIX

Connector: 8-pin RJ45

Magnetic Isolation Protection: 1.5 kV built-in

Ethernet Line Protection: EN 61000-4-5 (Surge) Level 2

Serial Interface

Number of Ports: 2

Serial Standards:

NPort 5210A: RS-232

NPort 5230A: RS-422/485

NPort 5250A: RS-232/422/485

Connector:

NPort 5210A/5250A: DB9 male

NPort 5230A: Terminal Block (5 pins per port)

Serial Line Protection: EN 61000-4-5 (Surge) Level 1

RS-485 Data Direction Control: ADDC® (Automatic Data Direction Control)

Pull High/Low Resistor for RS-485: 1 kΩ, 150 kΩ

Serial Communication Parameters

Data Bits: 5, 6, 7, 8

Stop Bits: 1, 1.5, 2

Parity: None, Even, Odd, Space, Mark

Flow Control: RTS/CTS and DTR/DSR (RS-232 only), XON/XOFF

Baudrate: Supports standard baudrates (unit=bps):

50, 75, 110, 134, 150, 300, 600, 1200, 1800, 2400, 4800, 7200, 9600, 19200, 38400, 57600, 115200, 230.4k, 460.8k, 921.6k

Serial Signals

RS-232: Tx+, Rx+, RTS, CTS, DTR, DSR, DCD, GND

RS-422: Tx+, Tx-, Rx+, Rx-, GND

RS-485-4w: Tx+, Tx-, Rx+, Rx-, GND

RS-485-2w: Data+, Data-, GND

Software

Network Protocols: ICMP, IPv4, TCP, UDP, DHCP, BOOTP, Telnet, DNS, SNMP V1, HTTP, SMTP, IGMP V1/2, ARP

Configuration Options: Web Console (with new Quick Setup), Serial Console (NPort 5210A/5250A only), Telnet Console, Windows Utility

Windows Real COM Drivers: Windows 95/98/ME/NT/2000, Windows XP/2003/Vista/2008/7/8/8.1/10 (x86/x64), Windows 2008 R2/2012/2012 R2 (x64), Windows Embedded CE 5.0/6.0, Windows XP Embedded

Fixed TTY Drivers: SCO Unix, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X

Linux Real TTY Drivers: Linux 2.4.x, 2.6.x, 3.x, 4.x

Android API: Android 3.1.x and later

Physical Characteristics

Housing: Metal

Weight: 340 g (0.75 lb)

Dimensions:

Without ears: 77 x 111 x 26 mm (3.03 x 4.37 x 1.02 in)

With ears: 100 x 111 x 26 mm (3.94 x 4.37 x 1.02 in)

Environmental Limits

Operating Temperature:

Standard Models: 0 to 60°C (32 to 140°F)

Wide Temp. Models: -40 to 75°C (-40 to 167°F)

Storage Temperature: -40 to 75°C (-40 to 167°F)

Ambient Relative Humidity: 5 to 95% (non-condensing)

Power Requirements

Input Voltage: 12 to 48 VDC

Input Current: 119 mA @ 12 VDC

Standards and Certifications

Safety: UL 60950-1

EMC: EN 55032/24

EMI: CISPR 32, FCC Part 15B Class A

EMS:

IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV

IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m

IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV

IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV

IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m

IEC 61000-4-8 PFMF

IEC 61000-4-11 DIPs

Reliability

Automatic Reboot Trigger: Built-in WDT (watchdog timer)

MTBF (mean time between failures)

Time: 847,750 hrs

Standard: Telcordia (Bellcore) Standard TR/SR


Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

Dimensions

Unit: mm (inch)

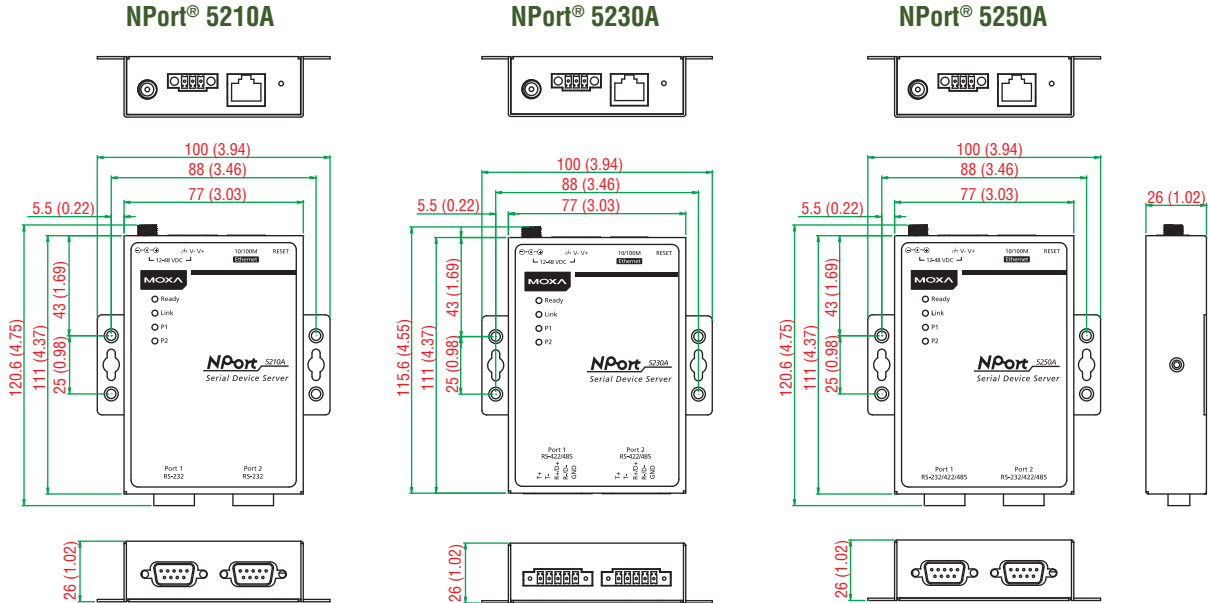


Pin Assignment

NPort® 5250A (RS-232/422/485)

PIN	RS-232	RS-422/485-4w	RS-485-2w
1	DCD	TxD-(A)	—
2	RxD	TxD+(B)	—
3	TxD	RxD+(B)	Data+(B)
4	DTR	RxD-(A)	Data-(A)
5	GND	GND	GND
6	DSR	—	—
7	RTS	—	—
8	CTS	—	—


DB9 male connector



NPort® 5230A (RS-422/485)

PIN	RS-422/485-4w	RS-485-2w
1	TxD+(B)	—
2	TxD-(A)	—
3	RxD+(B)	Data+(B)
4	RxD-(A)	Data-(A)
5	GND	GND


5-contact terminal block



NPort® 5210A (RS-232)

PIN	RS-232
1	DCD
2	RxD
3	TxD
4	DTR
5	GND
6	DSR
7	RTS
8	CTS

DB9 male connector



Ordering Information

Available Models

NPort 5210A: 2-port RS-232 device server, 0 to 60°C operating temperature

NPort 5230A: 2-port RS-422/485 device server, 0 to 60°C operating temperature

NPort 5250A: 2-port RS-232/422/485 device server, 0 to 60°C operating temperature

NPort 5210A-T: 2-port RS-232 device server, -40 to 75°C operating temperature

NPort 5230A-T: 2-port RS-422/485 device server, -40 to 75°C operating temperature

NPort 5250A-T: 2-port RS-232/422/485 device server, -40 to 75°C operating temperature

Optional Accessories (can be purchased separately)

DK35A: DIN-rail mounting clips, 35 mm, 2 DIN-rail plates with 4 screws

Mini DB9F-to-TB: DB9 female to terminal block adapter for RS-422/485 applications






Note: One power adapter suitable for your region is included in the product package. Additional power adapters can be purchased separately. Please refer to the Power Accessory Selection Guide for details.





Package Checklist

- 1 NPort 5200A device server
- 100 to 240 VAC power adapter (excluding T models)*
- Documentation and software CD
- Quick installation guide (printed)
- Warranty card






*The package includes one power adapter suitable for your region.








Power Accessory Selection Guide

Barrel Plug Type		Locking Barrel Plug				
O/P		12 VDC 0.5 A, 100 to 240 VAC (Switch-Mode)				
Plug Type		US/JP	EU	AU	UK	CN
Appearance						
Model Name		PWR-12050-WPUSJP-S1	PWR-12050-WPEU-S1	PWR-12050-WPAU-S1	PWR-12050-WPUK-S1	PWR-12050-WPCN-S1
1 Port	NPort 5110	—	—	—	—	—
	NPort 5130	—	—	—	—	—
	NPort 5150	—	—	—	—	—
	NPort 5110A	✓	✓	✓	✓	✓
	NPort 5130A	✓	✓	✓	✓	✓
	NPort 5150A	✓	✓	✓	✓	✓
	DE-211	—	—	—	—	—
	DE-311	—	—	—	—	—
	NPort P5150A	✓	✓	✓	✓	✓
	NPort W2150A	✓	✓	✓	✓	✓
2 Ports	NPort Z2150/Z3150	✓	✓	✓	✓	✓
	NPort 5210	—	—	—	—	—
	NPort 5230	—	—	—	—	—
	NPort 5232	—	—	—	—	—
	NPort 5232I	—	—	—	—	—
	NPort 5210A	✓	✓	✓	✓	✓
	NPort 5230A	✓	✓	✓	✓	✓
	NPort 5250A	✓	✓	✓	✓	✓
	NPort W2250A	✓	✓	✓	✓	✓

Barrel Plug Type		Non-Locking Barrel Plug				
O/P		12 VDC 0.5 A, 100 to 240 VAC (Switch-Mode)				
Plug Type		US/JP	EU	AU	UK	CN
Appearance						
Model Name		PWR-12050-WPUSJP-S2	PWR-12050-WPEU-S2	PWR-12050-WPAU-S2	PWR-12050-WPUK-S2	PWR-12050-WPCN-S2
1 Port	NPort 5110	✓	✓	✓	✓	✓
	NPort 5130	✓	✓	✓	✓	✓
	NPort 5150	✓	✓	✓	✓	✓
	NPort 5110A	—	—	—	—	—
	NPort 5130A	—	—	—	—	—
	NPort 5150A	—	—	—	—	—
	DE-211	✓	✓	✓	✓	✓
	DE-311	✓	✓	✓	✓	✓
	NPort P5150A	—	—	—	—	—
	NPort W2150A	—	—	—	—	—
2 Ports	NPort Z2150/Z3150	—	—	—	—	—
	NPort 5210	✓	✓	✓	✓	✓
	NPort 5230	✓	✓	✓	✓	✓
	NPort 5232	✓	✓	✓	✓	✓
	NPort 5232I	✓	✓	✓	✓	✓
	NPort 5210A	—	—	—	—	—
	NPort 5230A	—	—	—	—	—
	NPort 5250A	—	—	—	—	—
	NPort W2250A	—	—	—	—	—

Power Accessory Selection Guide

Barrel Plug Type		Non-Locking Barrel Plug				
O/P		12 VDC 1.25/1.5 A, 100 to 240 VAC				
Plug Type		US/JP	EU	AU	UK	CN
Appearance						
Model Name		PWR-12125-WPUSJP-S1	PWR-12125-WPEU-S1	PWR-12125-WPAU-S1	PWR-12125-WPUK-S1	PWR-12125-WPCN-S1
4 Ports	NPort 5410	✓	✓	✓	✓	✓
	NPort 5430	✓	✓	✓	✓	✓
	NPort 5430I	✓	✓	✓	✓	✓
	NPort 5450	✓	✓	✓	✓	✓
	NPort 5450I	✓	✓	✓	✓	✓
8 Ports	NPort 5610-8	—	—	—	—	—
	NPort 5630-8	—	—	—	—	—
	NPort 5650-8	—	—	—	—	—
	NPort 5650-8-M-SC	—	—	—	—	—
	NPort 5650-8-S-SC	—	—	—	—	—
	NPort 5610-8-DT	—	—	—	—	—
	NPort 5610-8-DT-J	—	—	—	—	—
	NPort 5650-8-DT	—	—	—	—	—
	NPort 5650-8-DT-J	—	—	—	—	—
	NPort 5650I-8-DT	—	—	—	—	—
	NPort 5610-8-DTL	—	—	—	—	—
	NPort 5650-8-DTL	—	—	—	—	—
	NPort 5650I-8-DTL	—	—	—	—	—
16 Ports	NPort 5610-16	—	—	—	—	—
	NPort 5630-16	—	—	—	—	—
	NPort 5650-16	—	—	—	—	—

Barrel Plug Type		Locking Barrel Plug						
O/P		12 VDC 2 A, 100 to 240 VAC (desktop type)	10A/250V Power Cord, 183 cm					
Plug Type		Requires 1 power cord (US/JP/EU/AU/UK/CN)	US	JP	EU	AU	UK	CN
Appearance								
Model Name		PWR-12200-DT-S1	PWC-C13US-3B-183	PWC-C13JP-3B-183	PWC-C13EU-3B-183	PWC-C13AU-3B-183	PWC-C13UK-3B-183	PWC-C13CN-3B-183
4 Ports	NPort 5410	—	—	—	—	—	—	—
	NPort 5430	—	—	—	—	—	—	—
	NPort 5430I	—	—	—	—	—	—	—
	NPort 5450	—	—	—	—	—	—	—
	NPort 5450I	—	—	—	—	—	—	—
8 Ports	NPort 5610-8	—	✓	✓	✓	✓	✓	✓
	NPort 5630-8	—	✓	✓	✓	✓	✓	✓
	NPort 5650-8	—	✓	✓	✓	✓	✓	✓
	NPort 5650-8-M-SC	—	✓	✓	✓	✓	✓	✓
	NPort 5650-8-S-SC	—	✓	✓	✓	✓	✓	✓
	NPort 5610-8-DT	✓	✓	✓	✓	✓	✓	✓
	NPort 5610-8-DT-J	✓	✓	✓	✓	✓	✓	✓
	NPort 5650-8-DT	✓	✓	✓	✓	✓	✓	✓
	NPort 5650-8-DT-J	✓	✓	✓	✓	✓	✓	✓
	NPort 5650I-8-DT	✓	✓	✓	✓	✓	✓	✓
	NPort 5610-8-DTL	✓	✓	✓	✓	✓	✓	✓
	NPort 5650-8-DTL	✓	✓	✓	✓	✓	✓	✓
	NPort 5650I-8-DTL	✓	✓	✓	✓	✓	✓	✓
16 Ports	NPort 5610-16	—	✓	✓	✓	✓	✓	✓
	NPort 5630-16	—	✓	✓	✓	✓	✓	✓
	NPort 5650-16	—	✓	✓	✓	✓	✓	✓