

# IES215-2F

3 port 10/100M Ethernet+ 2 port 100M fiber unmanaged

## Features

- 1.Support 3 port 10Base-T/100Base-TX Ethernet and 2 port 100Base-FX
- 2.Support IEEE802.3/802.3u store and forward
- 3.Support Ethernet 10/100Mself-adaption
- 4.12~48VDC wide voltage power supply input
- 5.No fan, low consumption design
- 6.IP40 protection, high strength metal shell, DIN rail mount
- 7.-40~75°C working temperature




## Introduction

IES215-2F is a type of unmanaged industrial Ethernet switch with 3 port 10Base-T/100Base-TX Ethernet and 2 port 100Base-FX, supports IEEE802.3, IEEE802.3u, IEEE802.3x standard, can provide economical solution for your network connection. IP40 grade protection ensures reliable work in terrible environment. LED

indicator is helpful to monitor and control the status of network connection. It complies with FCC, CE standard.-DIN rail installation and wide operating temperature (-40~75 °C), can satisfied some kinds of industrial environment, can provide reliable and quickly solution for your Ethernet device.

## Dimension and appearance

Unit (mm)

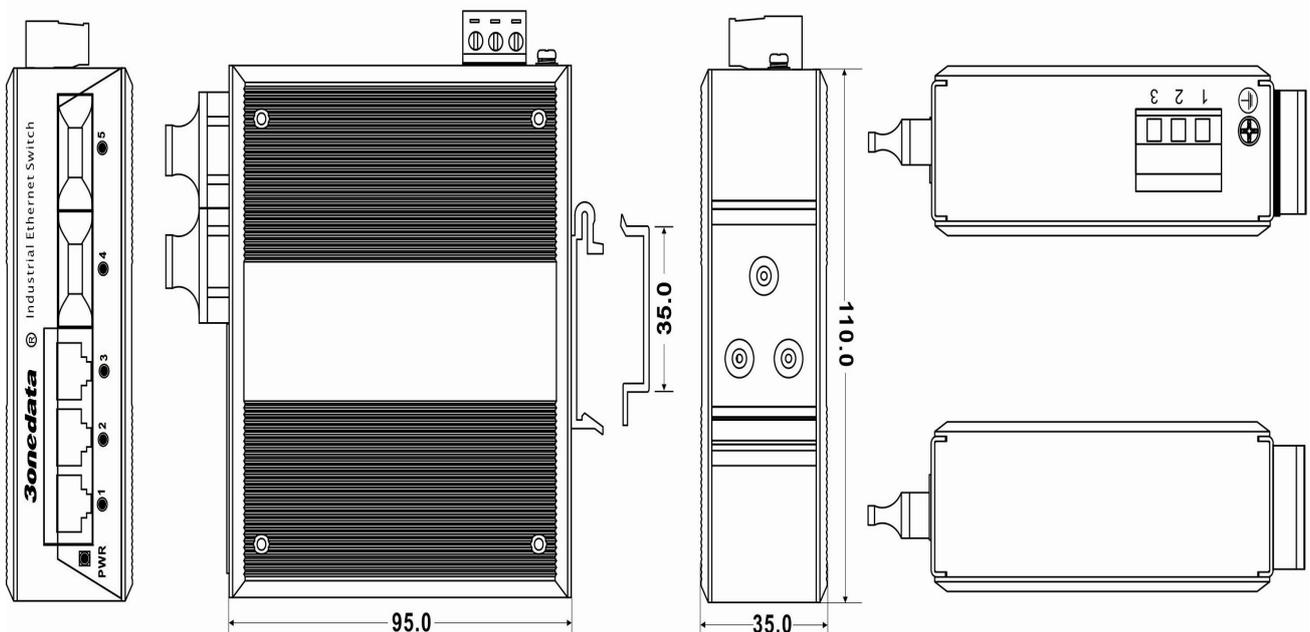

**Specification****Technology:**

Standard: IEEE802.3, IEEE802.3u

**Interface:**

Ethernet: 10/100Base-TX self-adaption, RJ45 port

Fiber: 100BaseFX( SC/ST optional)

**Transfer distance**

Twisted cable: 100m(CAT5/CAT5e)

Multi mode fiber: 1310nm,2Km

Single mode fiber: 1310nm, 20K, 1310nm, 40Km  
1310nm, 60K, 1550nm, 80Km**Exchange attribute:**

100M transmit speed: 148810pps

Transfer: Store and forward

System exchange bandwidth: 1 G

Buffer memory: 64Kbits

Support 2K MAC address table

**LED indicator**

Interface indicator: 1~5 (LINK/ACT)

Power supply indicator: PWR

**Power supply**

Input voltage: 24VDC(12~48VDC)

Terminal block: 3 bits 7.62mm terminal block

None load consumption: 2.0W@24VDC

Full load consumption: 2.6W@24VDC

Support inside over-current 4.0A protection

Support opposite connection protection

**Mechanical**

Shell: IP40, high strength iron shell.

Installation: DIN Rail

Dimension (W×H×D: 110 mm×95mm×35mm

Weight: 370g

**Environmental**

Operating Temperature: -45°C to 75°C

Storage Temperature: -45°C to 85°C

Relative Humidity: 10 to 95% (non-condensing)

**Standard**

EMI: FCC Part 15, CISPR (EN55022) class A

EMS: EN61000-4-2 (ESD), Level 4

EN61000-4-3(RS), Level 3

EN61000-4-4 (EFT), Level 4

EN61000-4-5 (Surge), Level 4

EN61000-4-6(CS), Level 3

EN61000-4-8(PFM), Level 5

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

**Warranty**

Warranty time: 5 years

**Certification**

CE, FCC, RoHS, UL508(Pending)

**Ordering information**

Option model	Port			Power	
Standard model	Ethernet	Optic fiber port (SC/ST)			12~48VDC
		SM	SS	MM	
IES215	5	—	—	—	
IES215-1F	4	1			
IES215-2F	3	2			