

ADAM-4053

ADAM-4055

ADAM-4080

16-ch Digital Input Module

16-ch Isolated Digital I/O Module with Modbus


2-ch Counter/Frequency Module



ADAM-4053



ADAM-4055

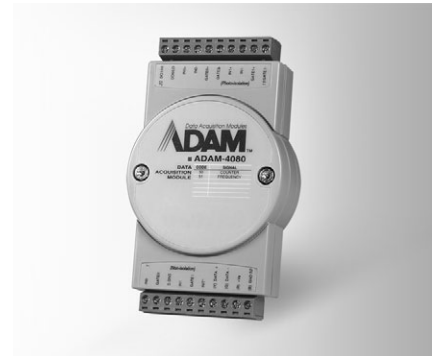

ADAM-4080



Specifications

General

- Connectors 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- Power Consumption 1 W @ 24 V_{DC}
- Watchdog Timer System (1.6 second)
- Supported Protocols ASCII command

Digital Input

- Channels 16
- Input Level
 - Dry contact: Logic level 0: close to GND
Logic level 1: open
 - Wet contact: Logic level 0: 2 V max.
Logic level 1: 4 ~ 30 V
- Effective Distance 500 m max.
(dry contact only)

Specifications

General

- Connectors 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- Power Consumption 1 W @ 24 V_{DC}
- Watchdog Timer System (1.6 second) & Communication
- Supported Protocols ASCII command and Modbus/RTU
- Isolation Voltage 2,500 V_{DC}
- LED Indicators Yes

Digital Input

- Channels 8
- Input Level
 - Dry Contact: Logic level 0: open
Logic level 1: close to GND
 - Wet Contact: Logic level 0: 3 V max.
Logic level 1: 10 ~ 50 V
- Overvoltage Protection 70 V_{DC}

Digital Output

- Channels 8, open collector to 40 V
(200 mA max. load)
- Power Dissipation Channel: 1 W max.
Total: 2.2 W (8 Channels)

Specifications

General

- Connectors 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- Power Consumption 2.0 W @ 24 V_{DC}
- Watchdog Timer System (1.6 second)
- Supported Protocols ASCII command
- LED Indicators 5-digit readout, Ch 0 or Ch 1 (programmable)

Counter Input

- Channels 2 independent counters (32-bit + 1-bit overflow)
- Input Frequency 50 kHz max.
- Input Pulse Width >10 μs.
- Input Mode Isolated or non-isolated
- Isolated Input Level Logic level 0: 1 V max.
Logic level 1: 3.5~30 V
- Isolation Voltage 2,500 V_{RMS}
- Non-isolated Input Level Programmable threshold:
Logic level 0: 0.8 V_{max}.
Logic level 1: 2.4 ~ 5.0 V
- Maximum Count 4,294,967,295 (32 bits)
- Preset Type Absolute or relative
- Programmable Digital Noise Filter 2 μs ~ 65 ms
- Alarm Alarm comparators on each counter
- Frequency Measurement Range 5 Hz ~ 50 kHz
- Programmable Built-in Gate Time 1 or 0.1 second

Digital Output

- Channels 2, open collector to 30 V, 30 mA max. load
- Power Dissipation 300 mW for each channel

Common Specifications

General

- Power Input Unregulated 10 ~ 30 V_{DC}

Environment

- Humidity 5 ~ 95% RH
- Operating Temperature -10 ~ 70°C
(14 ~ 158°F)
- Storage Temperature -25 ~ 85°C
(-13 ~ 185°F)

Ordering Information

- ADAM-4053 16-ch Digital Input Module
- ADAM-4055 16-ch Isolated Digital I/O Module with Modbus
- ADAM-4080 2-ch Counter/Frequency Modules