






## 4G WAN Extender IDG500-0T012

### Functions:

- Expanding LTE based WAN connection for various IP networks at instant, including enterprise , industry, surveillance , WiFi hotspot network.
- To be primarily or backup WAN for IP network enhances connection. It can expand fail-over for network at single WAN between LTE and Ether-WAN. There are dual SIMs for single LTE to achieve ISP fail-over when primarily fail.
- Compact and easy to be integrated into solution. Device covers LTE and two port Fast Ethernet LAN (One configurable WAN). Micro-SD used for log storage .
- Capable of rich VPN tunnel technology can build VPN tunnel between IP network/network device with remote center or allow clients to connect in for secure data transmission.
- Cellular toolkit simplifies setting and utilizes ISP service. Data usage monitoring for budget control. Self-defined SMS commands for easy and quick management.
- Both IPv4/IPv6 protocol stack meet ISP requirement. Gateway base on IP pass through or DHCP based NAT with Port Forwarding. Rich Routing function covers static, dynamic and OSPF compatible with most IP network.
- Web-UI for basic setting. CLI and Command Script for advance setting. TR-069 used with AMIT-NMS for multi-site management. SNMP used for popular network tools management. SDK used for application expansion development.

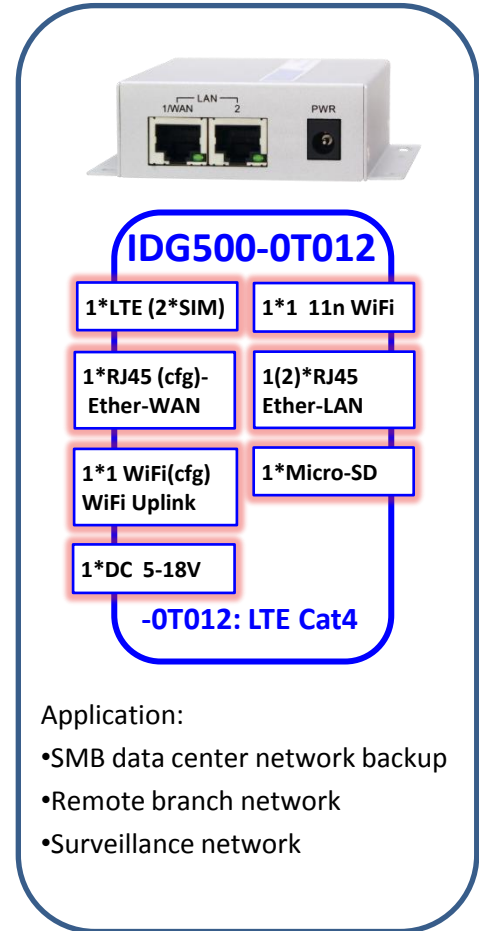

### Connection Diagram:

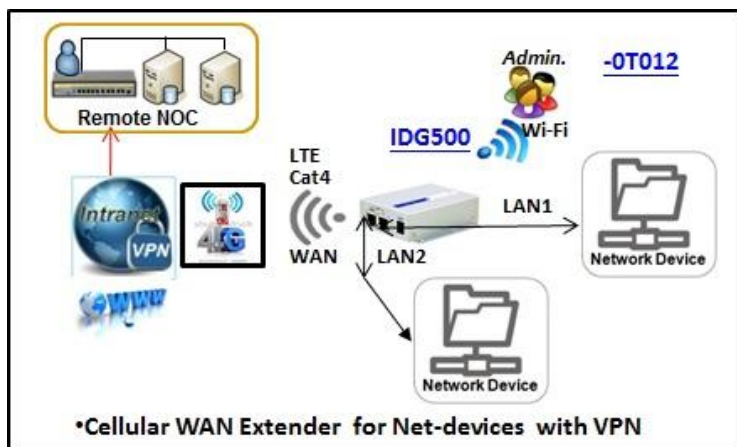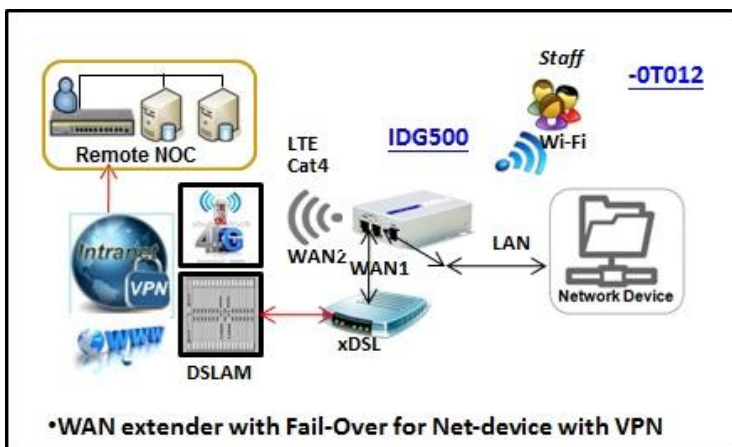

# Specification Summary

## Device Interface

- **LTE Module:** 1\*LTE-Cat.4, 2\*SIM
- **Ethernet :** 1(2)\*RJ45 FE
- **WiFi:** 1\*11n-1\*1
- **Log Storage:** 1\*MicroSD
- **Power Input :** 1\* DC 5V ~ 18V (DC Jack)
- **Antenna Con.:** 2\*SMA (F)-LTE,1\*SMA(M)-WiFi

## WAN & Uplink

- **WAN:** Cellular, Ether-WAN, 1\* config. 11n WiFi; Failover
- **Cellular:** 2G/3G/LTE, IP Pass-through, IPv4/v6
- **Ether-WAN:** Dynamic IP, Static IP, PPPoE, PPTP, L2TP
- **Network Monitor:** ICMP/DNS Query

## WiFi

- **Standard:** IEEE 802.11 Industry Compliance
- **Mode:** AP Router
- **Functions:** Multi-SSID, WMM
- **Security:** WEP, WPA, WPA2, WPA-PSK, WPA2-PSK, 802.1x

## Protocol

- **LAN & VLAN:** DHCP Server/Relay, Port/Tag based VLAN
- **IPv6\*:** Dual Stack, Static IPv6, DHCPv6, PPPoEv6
- **Port Forward:** Virtual Server, Virtual Computer, DMZ, VPN Pass-through
- **Routing:** Static, Dynamic - RIP1/RIP2, OSPF

## Object

- **Scheduling:** Time Schedule List
- **Grouping:** Host Grouping List
- **Ext. Server:** Email, Syslog, RADIUS, SCEP, FTP, DDNS, IGMP
- **Certificate:** My Certificate, Trusted Certificate, Issue Certificate

## Security

- **VPN Tunneling:** IPSec, OpenVPN, PPTP, L2TP, GRE
- **VPN Capability:** IPSec: up to 3 tunnels
- **Firewall:** SPI Firewall with Stealth Mode, IPS
- **Access Control:** Packet Filter, URL Blocking, MAC Filter

## Administration

- **Config & Mgmt. :** Web, Telnet & SSL, Command Script, SNMPv3 Std. & Proprietary MIB, TR069
- **System:** Upgrade, Backup & Restore, Reboot & Reset, SysLog
- **Diagnostic:** Packet Analyzer, Diagnostic Tools

## Service

- **Cellular Toolkit:** Data Usage, SMS, SIM PIN, USSD, Network Scan
- **Event Handling:** User Defined Manage/Notify Event; SMS, Mail, Syslog, SNMP Trap, System HW

## Environment

- **OP/Store Temp.:** -30°C ~ 70°C ; -40°C ~ 85°C
- **Humidity:** 10%~95% (non-condensing)
- **Enclosure:** Metal, Bracket
- **Ingress Protection Rating :** IP30
- **Weight:** 220g
- **Dimension:** 93x90x27mm

## Certificate - CE

- Standards & Regulation
- EMI: EN 55032: 2015 +AC: 2016 Class B, EN61000-3/-6
- EMS: EN 55024, IEC 61000, EN61000-6
- Radio: EN 301 489, EN 300 328, EN50385
- Safety: EN 60950-1, EN 62368-1

## Package Accessory

- 1\*Device
- 2\*Cellular Antenna (3dBi), 1\*WiFi Ant.
- 1\*Power Adapter DC 5V/2A
- 1\*DIN Rail Kit
- 4\* Rubber feet, 1\*CD (User Manual)
- 1\*RJ45 Cable

## SKU Information:

### IDG500-0T012-00-yy : LTE Cat.4

'yy': Area Variant. As below table

yy	Skew	Band	Module Cert.	System Cert.
<b>E0</b>	EU Taiwan	B1/3/7/8/20/28	CE,GCF NCC	CE
<b>U0</b>	US	B2/4/5/12/13/14/66/71	PTCRB, AT&T, Verizon	TBC
<b>J0</b>	Japan	B1/8/9/18/19/21/41	Telec, NTT, KDDI, Softbank	Telec
<b>C0</b>	China	B3/39/40/41	MII,SRRC	TBC
<b>A0</b>	Australia	B1/3/5/7/28/40	RCM	TBC

## Comment

- Specifications are subject to change without prior notice..
- Besides CE, region Certification need to check for availability.

## Mechanic Drawing

### • Front View



### • Back View

