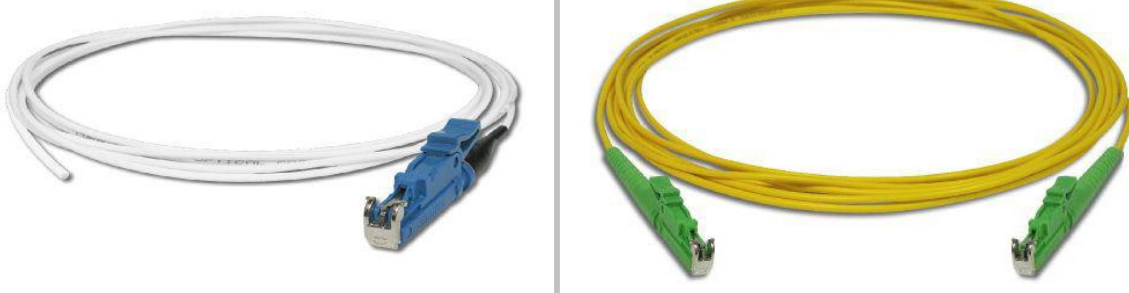


Item	Fiber Optic Patch Cord / Pigtail
Model NO.	E2000-E2000-Patch-Cord
Description	E2000 Fiber Optical Patch Cord
	

Overview

The E2000 Connector /LX-5 is like a LC but with a shutter over the end of the fiber.

Features

- Superior qualified standard PC/UPC/APC polishing
- 100% optic test (Insertion Loss & Return Loss)
- 0.9mm, 2.0mm and 3.0mm cable optional
- Comply to IEC Standard

Applications

- High Speed and volume Fiber Optic Transmission Systems
- CATV Networks
- LAN
- Fiber Optic Instrumentation

Specification

Patch Cord/Pigtail Spec			
Type	Single mode(UPC)	Single mode(APC)	Multi-mode (PC)
Insertion loss	≤0.2 dB	≤0.2 dB	≤0.2 dB
Return Loss	≥50 dB	≥60 dB	≥35 dB
Repeatability	≤0.1dB		
Durability	≥1000matings		
Operating Temperature	-40 °C to +80 °C		
Tensile Strength(N)	≥90N (φ3), ≥70N (φ2)		



Order Information

Port	Polishing	Port	Polishing	Fiber Type	Cable Type	Fiber Length	Jacket
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
FC=FC	U=UPC	FC=FC	U=UPC	SM=SM 9/125um	S9=Simplex 0.9mm	001M=1 meter	P=PVC
SC=SC	A=APC	SC=SC	A=APC	M5=MM 50/125um	S2=Simplex 2.0mm	002M=2 meter	L=LSZH
ST=ST		ST=ST		M6=MM 62.5/125um	S3=Simplex 3.0mm	
LC=LC		LC=LC		O3=MM OM3	D2=Duplex 2.0mm	001F=1 foot	
MU=MU		MU=MU		O4=MM OM4	D3=Duplex 3.0mm	002F=2 foot	
RJ=MT/RJ		RJ=MT/RJ			DR=Round Duplex (For MT/RJ only)		
E2=E2000		E2=E2000					
D4=D4		D4=D4					
FI=FDDI		FI=FDDI					
EN=ESCON		EN=ESCON					

Example: E2U-E2U-SM-S2-003M-P E2000/UPC-E2000UPC SM 2.0mm 3meter PVC