

FD602X-G-Z410 1GE+1FE+1POTS GPON ONU



Overview

FD602X-G-Z410 GPON ONT is one of the GPON optical network unit design to meet the requirement of the broadband access network. It apply in FTTH/FTTO to provide the data, voice and video service based on the GPON network.

GPON is the latest generations of access network technology. ITU-T G.984 is the standard protocol of GPON. The GPON standard differs from other PON standards in that it achieves higher bandwidth and higher efficiency using larger, variable-length packets. GPON offers efficient packaging of user traffic, with frame segmentation allowing higher quality of service (QOS) for delay-sensitive voice and video communications traffic. GPON networks provides the reliability and performance expected for business services and provides an attractive way to deliver residential services. GPON enables Fiber To The Home (FTTH) deployments economically resulting to accelerated growth worldwide.


FD602X-G-Z410 features high-performance forwarding capabilities to ensure excellent experience with VoIP, Internet and HD video services. It has good third-party compatibility to work with the third party OLT, such as Huawei/ZTE/Fiberhome/Alcatel-Lucent. It provides a perfect terminal solution and future-oriented service supporting capabilities for FTTH deployment.

Features


- In compliant with ITU - T G.984.1/2/3/4 standard
- Support ONU auto-discovery/Link detection/remote upgrade of software
- Support Ethernet line performance statistics function
- Support OMCI+TR069 management mode

- Support VLAN tag/untag
- Support multicast Snooping/Proxy
- Support DHCP/PPPOE/Static IP internet mode
- Support port binding
- Support loop-detection function
- Support device-based speed limitation
- Support MAC-address filter and URL access control
- Support H.248 and SIP protocol
- Support AES encryption and decryption
- Support Dynamic Bandwidth Allocation (DBA)
- Support ACL configure data packet filter flexibly
- EMS network management based on SNMP ,convenient for maintenance

Product Interface and LED Definitions

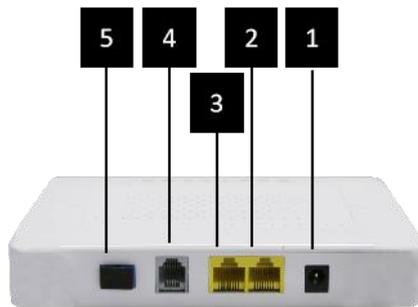

- 1** DC Power Port
- 2** GE Port
- 3** FE Port
- 4** Voice Port
- 5** Optical Port

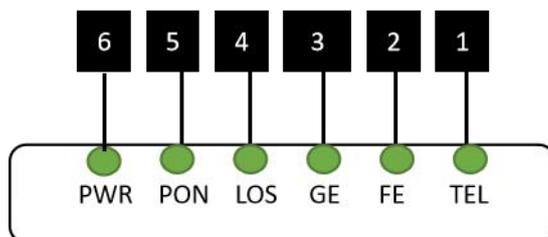

- 1** Voice Port Status
- 2** FE Port Status
- 3** GE Port Status
- 4** Optical Signals Status
- 5** ONU Register Status
- 6** Power Status

Indicator			Description
1	TEL	Telephone port status	On: The connection between the TEL port and the voice server has been set up Blinking: The voice service of the TEL port is established; Off: The connection between the TEL port and the voice server is not set up.
2	FE	FE port status	On: Ethernet connection is normal; Blinking: Data is being transmitted through the Ethernet port; Off: Ethernet connection is not set up;
3	GE	GE port status	On: Ethernet connection is normal; Blinking: Data is being transmitted through the Ethernet port; Off: Ethernet connection is not set up;
4	LOS	GPON optical signals	On: Optical power lower than receiver sensitivity ; Off: Optical in normal
5	PON	ONT Register	On: Success to register to OLT; Blinking: In process of registering to OLT; Off: In process of registering to OLT;
6	PWR	Power status	On: The ONT is power on; Off: The ONT is Power off;


Specification

Item	Parameters	Specification
Interface	PON Port	1*GPON port, FSAN G.984.2 standard, Class B+ Downstream Data Rate: 2.488Gbps Upstream Data Rate: 1.244Gbps SC/UPC single mode fiber 28dB Link loss and 20KM distance with 1:128
	Ethernet Port(LAN)	1*10/100/1000M and 1*10/100M adaptive ports Full Duplex / Half-Duplex RJ45, Auto-MDI/MDI-X Transmission Distance 100 Meter
	POTS Port	1*RJ11 Max 1km distance Balanced Ring, 50V RMS
	Power Supply Port	12V DC input
Performance Parameters	PON Optical Parameter	Wavelength: Tx 1310nm, Rx1490nm Tx Optical Power: 0.5~5dBm Rx Sensitivity: -28dBm Saturation Optical Power: -8dBm
	Data Transmission Parameter	PON Throughput: Downstream 2.488Gbit/s ; Upstream 1.244Gbit/s

		Ethernet: 1000Mbps or 100Mbps Packet Loss Ratio: <1*10E-12 latency: <1.5ms
Management	Network Management	OMCI, TR069, WEB, Telnet
	Management Function	Status monitor, Configuration management, Alarm management, Log management
Environmental Specifications	Power	External 12V/0.5A DC power supply adapter Power consumption: <5W
	Dimension and Weight	Item Dimension: 160mm(L)*112mm(W)*28.5mm(H) Item Net Weight: about 200g
	Environment	Operating Temperature: 0~40℃ Operating Humidity: 10%~90%(Non-condensing)

Network Application

- ✧ Solution: FTTH, FTTO
- ✧ Business: Broadband Internet, Voice, IPTV

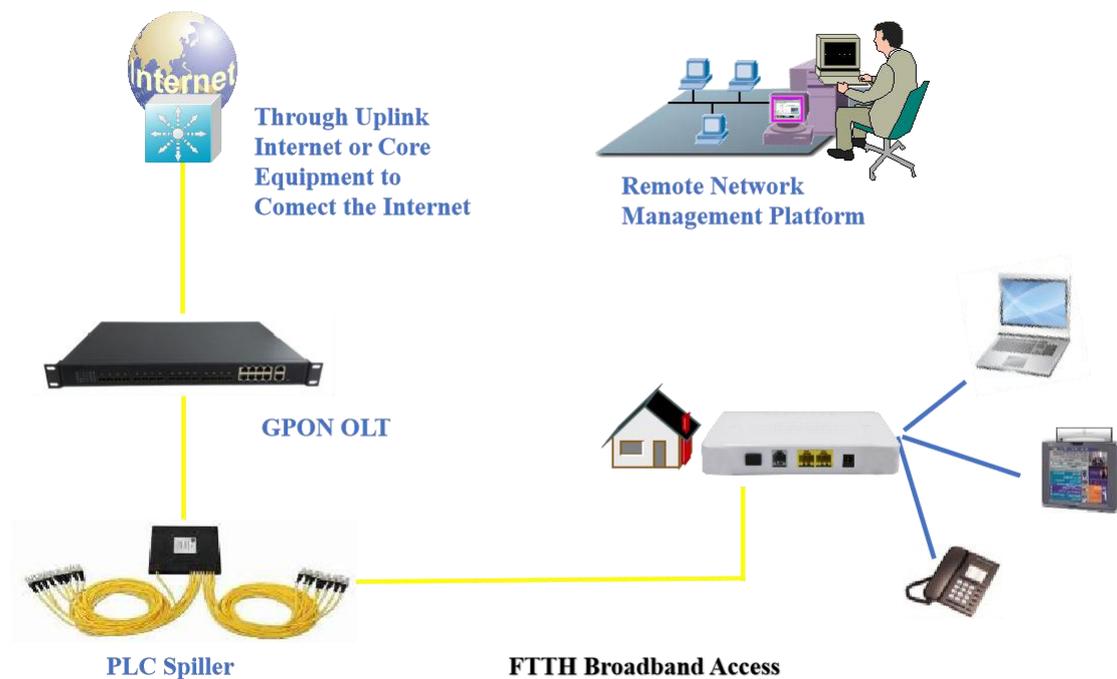

Ordering Information

Product Name	Product Model	Descriptions
1GE+1FE+1POTS	FD602X-G-Z410	1*10/100/1000M and 1*10/100M Ethernet interface, 1*POTS interface, 1 GPON interface, plastic casing, external power supply adapter