



PC Network:

Note : Every remote-PC must have a unique address.

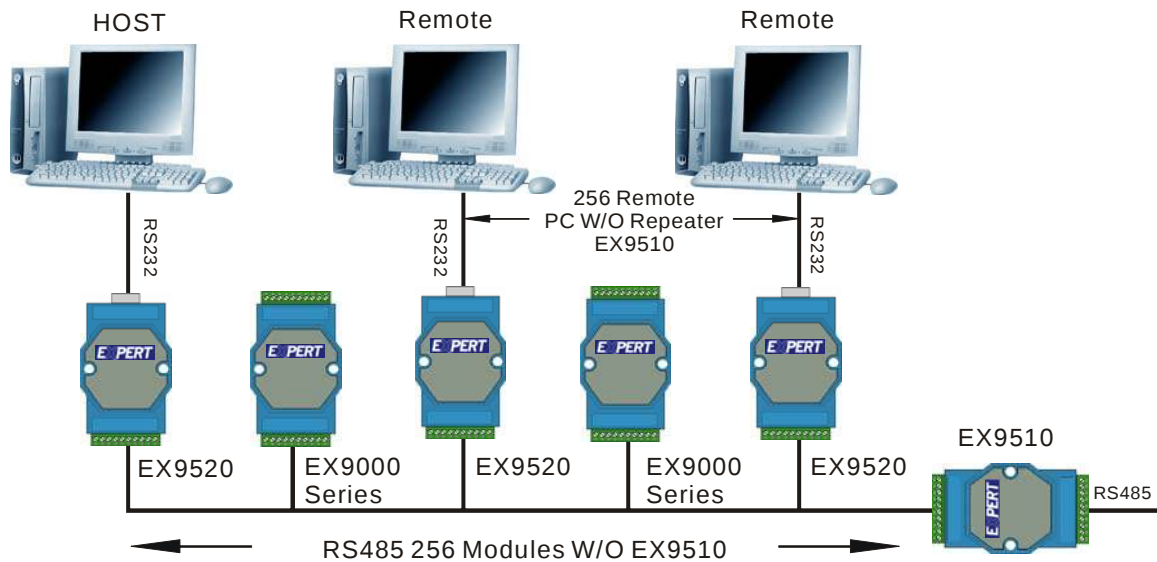

PLC Network:

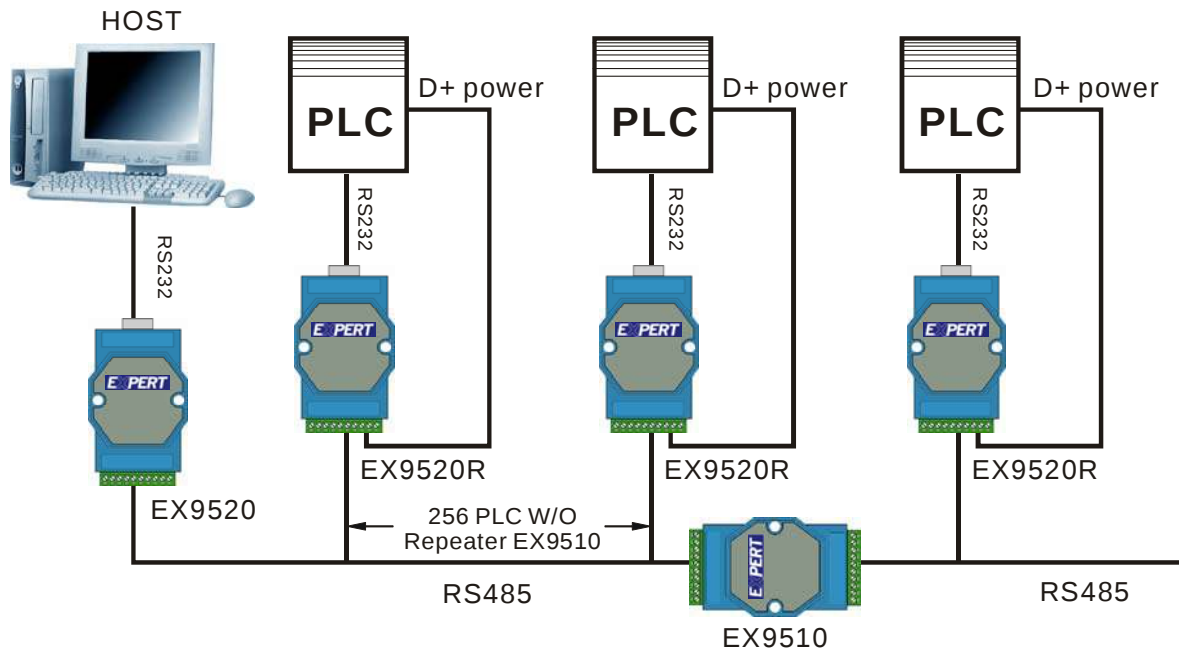

RS232 Devices Network:

Note : 1. Every device must have a unique device address.
2. It will not send out a RS-232 signal if the destination address does not match with the device address.

