

| | | |
|----------|--------------|--------------|
| File No. | File version | confidential |
| | 1.1.0 | |

F3B30 TD-SCDMA/TD-SCDMA WIFI ROUTER TECHNICAL SPECIFICATION




General

F3B30 TD-SCDMA/TD-SCDMA WIFI ROUTER is a kind of cellular terminal device that provides data transfer function by public cellular network. And it supports double link backup between TD-SCDMA and TD-SCDMA.

It adopts high-powered industrial 32-bits CPU and embedded real time operating system. It supports RS232 (or RS485/RS422), Ethernet and WIFI port that can conveniently and transparently connect one device to a cellular network, allowing you to connect to your existing serial, Ethernet and WIFI devices with only basic configuration.

It has been widely used on M2M fields, such as intelligent transportation, smart grid, industrial automation, telemetry, finance, POS, water supply, environment protection, post, weather, and so on.

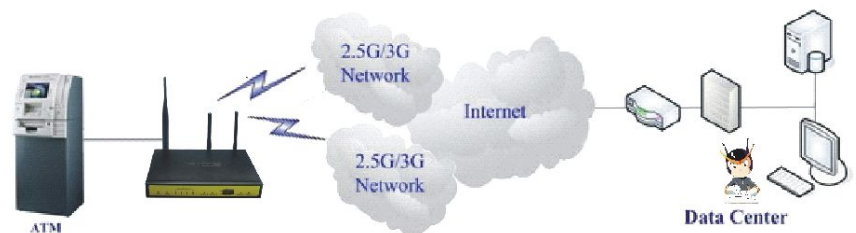

Product Feature

Design for Industrial Application

- ◆ High-powered industrial cellular module
- ◆ High-powered industrial 32bits CPU
- ◆ Support low-consumption mode, including sleep mode, scheduled online/offline mode, scheduled power-on/power-off mode(optional)
- ◆ Housing: iron, providing IP30 protection
- ◆ Power range: DC 5~35V

Stability and Reliability

- ◆ Support hardware and software WDT
- ◆ Support auto recovery mechanism, including online detect, auto redial when offline to make router always online
- ◆ Ethernet port: 1.5KV magnetic isolation protection
- ◆ RS232/RS485/RS422 port: 15KV ESD protection

- ◆ SIM/UM port: 15KV ESD protection
- ◆ Power port: reverse-voltage and overvoltage protection
- ◆ Antenna port: lightning protection(optional)

Standard and Convenience

- ◆ Support standard RS232(or RS485/RS422), Ethernet and WIFI port that can connect to serial, Ethernet and WIFI devices directly
- ◆ Support standard WAN port and PPPOE protocol that can connect to ADSL directly
- ◆ Support intellectual mode, enter into communication state automatically when powered
- ◆ Provide management software for remote management
- ◆ Support several work modes

- ◆ Convenient configuration and maintenance interface (WEB or CLI)

High-performance

- ◆ Support double link backup between TD-SCDMA and TD-SCDMA
- ◆ Support triple link backup among TD-SCDMA, TD-SCDMA and WAN(PPPOE, ADSL) (optional)
- ◆ Support Load Balancer and Load Shunt
- ◆ Support VPN client(PPTP, L2TP, OPENVPN, IPSEC and GRE)(only for VPN version)
- ◆ Support VPN server(PPTP, L2TP, OPENVPN, IPSEC and GRE)(only for VPN version)
- ◆ Support local and remote firmware upgrade,import and export configure file.
- ◆ Support NTP, RTC embedded.
- ◆ Support multiple DDNS provider service.
- ◆ Support VLANs, MAC Address clone, PPPoE Server

- ◆ WIFI support 802.11b/g/n. support AP, client, Adhoc, Repeater, Repeater Bridge and WDS(optional) mode.
- ◆ WIFI support WEP,WPA,WPA2 encryption,Support RADIUS authentication and MAC address filter.
- ◆ Support multi online trigger ways, including SMS, ring and data. Support link disconnection when timeout
- ◆ Support APN/VPDN
- ◆ Support DHCP server and client, firewall, NAT, DMZ host , URL block, QoS, ttraff,statistics, real time link speed statistics etc.
- ◆ Full protocol support , such as TCP/IP, UDP, ICMP, SMTP, HTTP, POP3, OICQ, TELNET, FTP, SNMP, SSHD, etc.
- ◆ Schedule Reboot, Schedule Online and Offline,etc.

Product Specification

Cellular Specification

| Cellular Module | Industrial cellular module |
|-------------------|--|
| Cellular Module | 2 Industrial cellular module |
| Standard and Band | TD-SCDMA/HSDPA/HSUPA 1880-1920/2010-2025MHz GSM850/900/1800/1900MHz GPRS/EDGE CLASS 12 |
| Bandwidth | Download speed:2.8Mbps, upload speed:2.2Mbps |
| TX power | <24dBm |
| RX sensitivity | <-108dBm |

WIFI Specification

| Item | Content |
|----------------|---|
| Standard | IEEE802.11b/g/n |
| Bandwidth | IEEE802.11b/g: 54Mbps (max) IEEE802.11n: 150Mbps (max) |
| Security | WEP, WPA, WPA2, etc. WPS (optional) |
| TX power | 21.5dBm (11g), 26dBm (11b) |
| RX sensitivity | <-72dBm@54Mbps |

Hardware System


| Item | Content |
|------|-----------------------|
| CPU | Industrial 32bits CPU |

F3B30 TD-SCDMA/TD-SCDMA WIFI ROUTER Technical Specification

| | |
|-------|-------------------------|
| FLASH | 8MB(Extendable to 64MB) |
| SDRAM | 64MB |

Interface type

| Item | Content |
|-----------|--|
| WAN | 1 10/100 Mbps WAN port(RJ45), auto MDI/MDIX, 1.5KV magnetic isolation protection |
| LAN | 4 10/100 Mbps Ethernet ports(RJ45), auto MDI/MDIX, 1.5KV magnetic isolation protection |
| Serial | 1 RS232(or RS485/RS422) port, 15KV ESD protection Data bits: 5, 6, 7, 8 Stop bits: 1, 1.5(optional), 2 Parity: none, even, odd, space(optional), mark(optional) Baud rate: 2400~115200 bps |
| Indicator | "Power", "System", "Online-1", "Online-2", "Local Network", "WAN", "WIFI", "Signal Strength". |
| Antenna | Cellular: 2 standard SMA female interfaces, 50 ohm, lightning protection(optional) WIFI: Standard SMA male interface, 50 ohm, lightning protection(optional) |
| SIM/UIM | 2 standard 3V/1.8V user card interfaces, 15KV ESD protection |
| Power | Standard 3-PIN power jack, reverse-voltage and overvoltage protection |
| Reset | Restore the router to its original factory default settings |

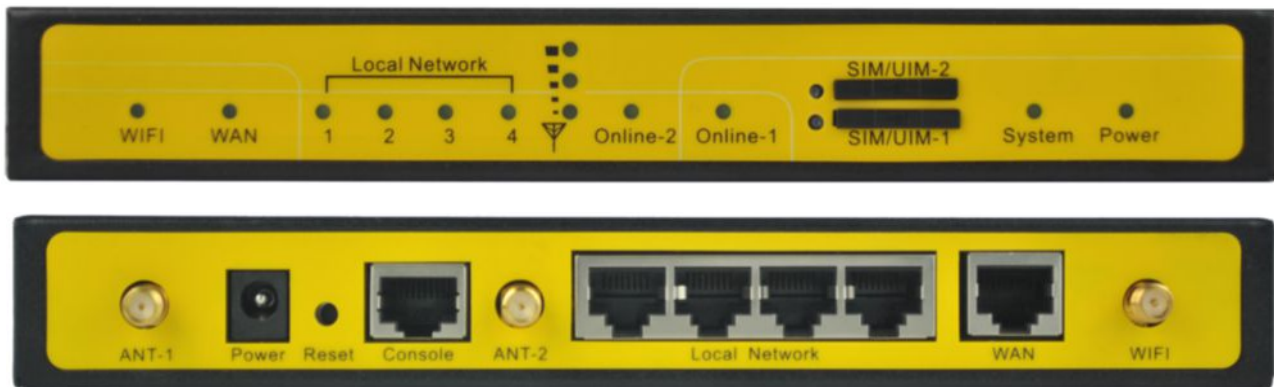

Power supply

| Item | Content |
|----------------|--------------|
| Standard Power | DC 12V/1.5A |
| Power range | DC 5~35V |
| Consumption | <500mA (12V) |

Physical Characteristics

| Item | Content |
|------------|---------------------------------|
| Housing | Iron, providing IP30 protection |
| Dimensions | 206x135x28 mm |
| Weight | 805g |

Environmental Limits

F3B30 TD-SCDMA/TD-SCDMA WIFI ROUTER Technical Specification

| Item | Content |
|-----------------------|------------------------|
| Operating Temperature | -35~+75°C (-31~+167°F) |
| Storage Temperature | -40~+85°C (-40~+185°F) |
| Operating Humidity | 95% (unfreezing) |