


Specification

Relay Output Module	
Output Channel	8
Contact Type	Form A: Normal Open
Contact Rating	5A@250VAC 5A@30VDC
Operate/Release Time	6mS/3mS max.
Life	Mechanical : 2*10^7 min. Electrical : 10^5 min.
Dielectric Strength	Between open contacts : 750VAC Between coil and contacts : 2000VAC
Surge Strength	4000V
LED Display	1 LED as Power indicator 8 LEDs as DO indicators
Power Consumption	Typical: 0.5W Max. : 1.7W

I-87064 Wire Connection

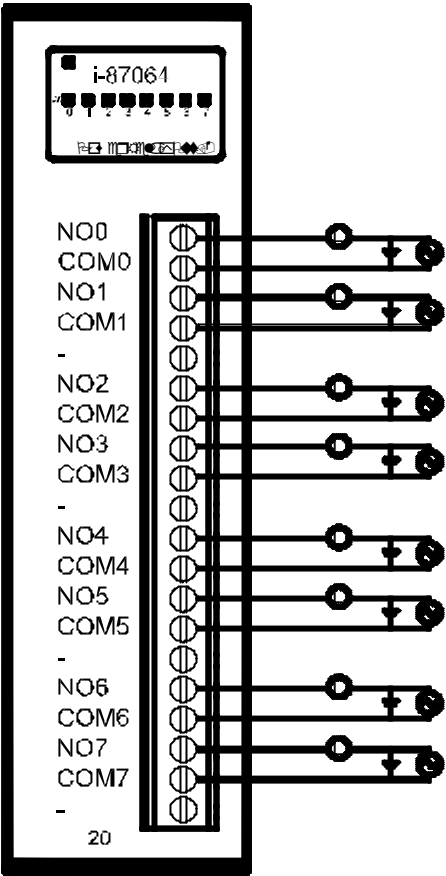

I-87064 Wire Connection Type

Output Type	ON State LED ON Readback as 1	OFF State LED OFF Readback as 0
Relay Contact		

I-87064 Internal I/O Structure

