

EM-2260 Series

Arm-based industrial computer-on-module with 4 serial ports, 2 LAN ports, 8 DI/DO, and 1 VGA port



Features and Benefits

- Cirrus Logic EP9315 Arm9 CPU, 200 MHz
- 128 MB RAM onboard, 32 MB flash disk
- Graphical user interface for external VGA output connection
- 2 kV optically isolated RS-232/422/485 serial ports
- Dual 10/100 Mbps Ethernet ports for network redundancy
- 8 DI and 8 DO channels
- Supports CompactFlash and USB 2.0 hosts
- Ready-to-run WinCE 6.0 platform
- Full-function development kit for quick evaluation and application development

Certifications




Introduction

The EM-2260 embedded module features 4 RS-232/422/485 serial ports, dual Ethernet ports, and an Enhanced Integrated Drive Electronic (EIDE) interface for designing an external storage connection, such as a CompactFlash socket or USB port signals. The module has a compact design that is easily integrated with a variety of industrial applications, including gas stations, vending machines, and ticketing machines, and offers a powerful serial communication capability for better system integration. Programmers will find the preinstalled, ready-to-run Windows CE 6.0 platform and full-function development kit a great benefit when developing software and building reliable communication bases for industrial automation applications.

The EM-2260 embedded module uses the Cirrus Logic EP9315 Arm9, 32-bit, 200 MHz RISC CPU. This powerful computing engine supports several useful communication functions, but will not generate a lot of heat. The built-in 32 MB NOR Flash ROM and 128 MB SDRAM give you enough memory to run your application software directly on the EM-2260. With its built-in VGA output interface, the EM-2260 is suitable for use with SCADA systems in industrial applications, such as manufacturing automation, production line process monitoring, and mining automation, that require VGA and HMI features.

The EM-2260 Development Kit provides users with a handy tool for first-time evaluation to test the functionality of the embedded core module. It has several peripherals built-in, including RS-232/422/485 ports and digital input and output, making it suitable for developing a variety of industrial applications.

Appearance

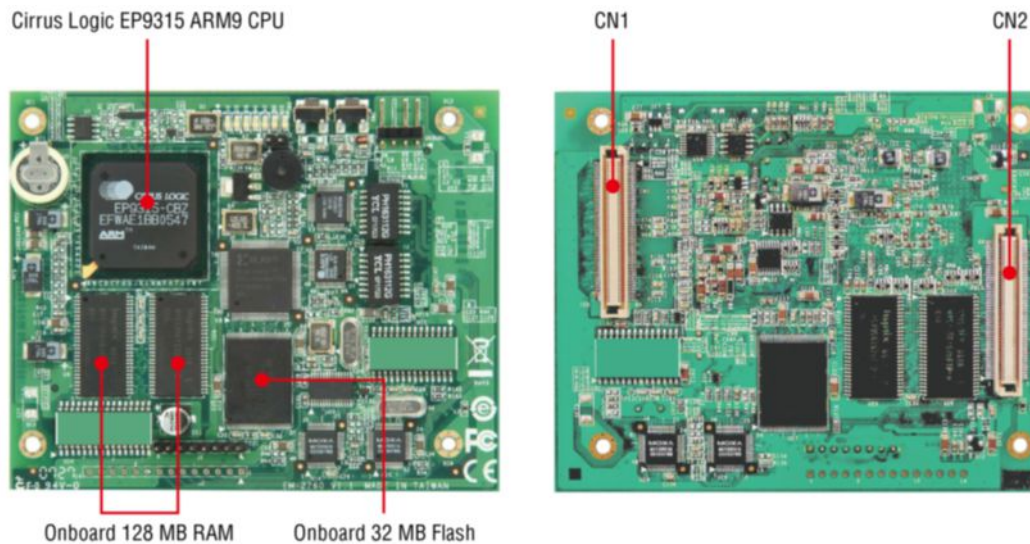

Specifications

Computer

| | |
|------------------|--|
| CPU | Cirrus EP9315 Arm9, 200 MHz |
| SDRAM | 128 MB |
| Flash | NOR Flash, 32 MB |
| Pre-installed OS | EM-2260-LX: μ CLinux EM-2260-CE: Microsoft Windows CE 6.0 |

Digital Inputs

| | |
|------------------------|-------------------|
| Digital Input Channels | DIs x 8 |
| Input Voltage | 3.3 V, CMOS level |

Digital Outputs

| | |
|-------------------------|-------------------|
| Digital Output Channels | DOs x 8 |
| Digital Output | 3.3 V, CMOS level |

Ethernet Interface

| | |
|-------------------------------|---|
| Ethernet Ports | Auto-sensing 10/100 Mbps ports (RJ45 connector) x 2 |
| Magnetic Isolation Protection | 1.5 kV (built-in) |

Display

| | |
|------------|------------|
| Resolution | 1024 x 768 |
|------------|------------|

Serial Interface

| | |
|--------------|--------------------|
| Serial Ports | 4 x RS-232/422/485 |
|--------------|--------------------|



Serial Signals

| | |
|--------------|--------------------------------------|
| Console Port | 1 x 4-pin header to DB9 console port |
| Data Bits | 5, 6, 7, 8 |
| Stop Bits | 1, 1.5, 2 |
| Parity | None, Even, Odd, Space, Mark |

| | |
|--|--|
| Flow Control | RTS/CTS, XON/XOFF, ADDC® (automatic data direction control) for RS-485, RTS Toggle (RS-232 only) |
| Baudrate | 50 bps to 921.6 kbps |
| RS-232 | TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND |
| RS-422 | Tx+, Tx-, Rx+, Rx-, GND |
| RS-485-4w | Tx+, Tx-, Rx+, Rx-, GND |
| Power Parameters | |
| Input Voltage | 12 VDC |
| Input Current | 480 mA @ 12 VAC |
| Power Consumption | 5.8 W |
| Reliability | |
| Alert Tools | Built-in buzzer and RTC (real-time clock) |
| Automatic Reboot Trigger | Built-in WDT |
| Physical Characteristics | |
| Dimensions | 106 x 87 mm (4.17 x 3.43 in) |
| Weight | 70 g (0.16 lb) |
| Environmental Limits | |
| Operating Temperature | -10 to 60°C (14 to 140°F) |
| Storage Temperature (package included) | -20 to 80°C (-4 to -176°F) |
| Standards and Certifications | |
| EMC | EN 55032/24, EN 61000-3-2 Class A, EN 61000-3-3, CISPR 32, FCC Part 15B Class A |
| Green Product | RoHS, CRoHS, WEEE |
| MTBF | |
| Time | 131,832 hrs |
| Standards | Telcordia (Bellcore) Standard |
| Warranty | |
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |

Dimensions

Unit: mm (inch)

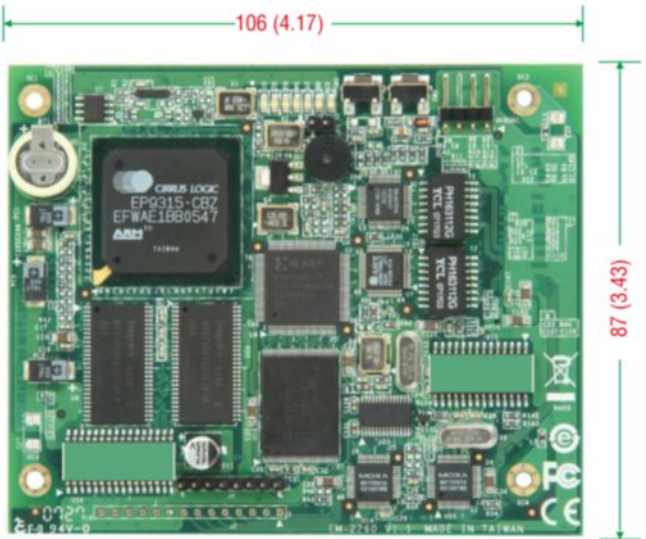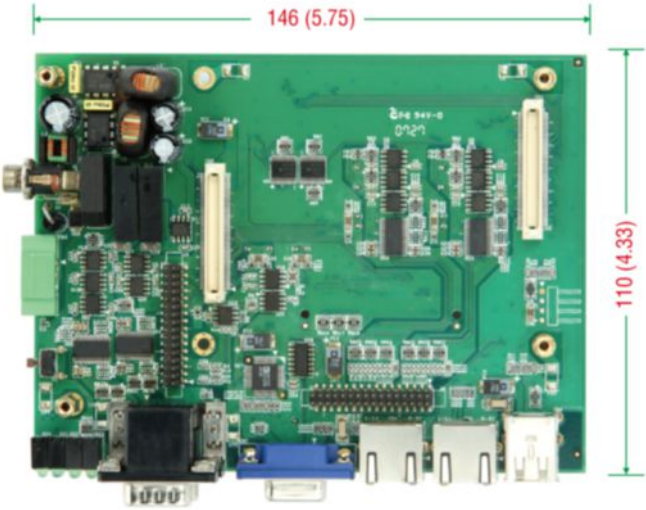

Ordering Information

| Model Name | Description |
|------------|--|
| EM-2260-CE | Arm-based embedded core module with 4 serial ports, 8 x DI and 8 DO channels, 2 Ethernet ports, VGA, CompactFlash, USB, WinCE 6.0 OS |
| EM-2260-LX | Arm-based embedded core module with 4 serial ports, 8 x DI and 8 DO channels, 2 Ethernet ports, VGA, CompactFlash, USB, Linux OS |

© Moxa Inc. All rights reserved. Updated Nov 12, 2018.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.