

OPT-IES1012P Industrial PoE Ethernet Switch

100Base-Fx to 2*10/100Base-Tx+PoE

RoHS Compliant



>>Description

OPT-IES1012P is OPTONE produced unmanaged 3-port PoE switches, providing 1 Fast Ethernet fiber optional port and 2 10/100Base-TX PoE ports compliant with IEEE802.3af and IEEE802.3at. While transmitting data over the cable, each PoE port can output 30 watts to PoE terminals directly, eliminating the need for additional wiring. OPT-IES1012P supports wide operating temperature range from -40°C to 85°C, metal housing with IP40 protection class and redundant power inputs, becoming an economical and harsh environment resistant solution for the ITS, video surveillance and other automation applications.

>>Main Features

- Green Ethernet solution with ultra low power consumption design
- Both standard and wide operating temperature
- Complies with IEEE 802.3, IEEE 802.3u, IEEE 802.3x auto-negotiation
- IEEE 802.3at, IEEE 802.3af PoE standard compliance
- Support PD detection and PD classification
- Supports auto MDI/MDIX function
- Status LED for easy monitoring of device status
- Supports up to 10K Byte Jumbo frames
- Support 8k MAC address
- Supports DIN-Rail and hang wall mounting
- Support dual power supply backup
- IP40 protection class

>> Specifications

Interface

- 2 x Ethernet+PoE port (RJ45) 10/100Base-Tx
- 1 x Optical port (1x9) 100Base-Fx

Optical Port

- Available for 1310nm and 1550nm Single mode, and 1310nm Multi mode
- Transfer Distance: up to 120km
- Connectors: SC or ST optional
- Fiber core: 8.3μm, 8.7μm, 9μm and 10μm on single-mode fiber; 50, 62.5 and 100μm on multi-mode fiber

Ethernet Port

- Cable: Cat 5/5e/6 UTP cable
- Available speed: force 10Mbps, force 100Mbps and auto-detective 10/100Mbps Full-Duplex and Half-Duplex auto-negotiation
- Connectors: RJ-45 Connector; MDI/MDI-X connection auto-sensing

Standard

- IEEE802.3 (10Base-T)
- IEEE802.3u (100Base-TX)
- IEEE802.3x (Flow control)
- IEEE802.3af (Power over Ethernet Standard)
- IEEE802.3at (Power over Ethernet enhancements Standard)

Switch Properties

- MAC Table: 8K
- Packet Buffer: 1Mbit
- Switching Delay: <5μs

LED Indicators

Power Status, Speed Status, FX Link/Act, TX Link/Act

PoE Specification

- Power Output: PoE 48V DC
- PoE Power Supply type: End-Span
- Power Pin Assignment: 1/2(+), 3/6(-)
- PoE Power Budget: Each port provides max 30W feed power

Power Requirement

- Input: 48VDC
- Consumption: MAX 3.8W(no PD), 63.8W(full PD)
- Overload Protection: Support
- Reverse Connection Protection: Support
- Redundancy Protection: Support

Physical Characteristics

- Housing: Metal enclosure
- Protection Class: IP40
- Dimensions: 36 x 120 x 103mm(Excluding the connector, DIN rail and component for panel mounting)
- Weight: 0.4kg
- Installation: DIN-Rail or Panel mounting

Environmental Limits

- Operating Temperature: -40°C to 85°C
- Storage Temperature: -40°C to 85°C
- Operating Humidity: 10% to 95% RH (non-condensing)
- Storage Humidity: 5% to 95% RH (non-condensing)

Agency Approvals

- FCC Part 15 of Class A & CE approved


Industrial Standard

- EMI: FCC/CE/LVD/EMC
- EMS:
 - IEC61000-4-2 (ESD): ±8kV (contact), ±15kV (air)
 - IEC61000-4-3 (RS): 10V/m (80MHz-2GHz)
 - IEC61000-4-4 (EFT): Power Port: ±4kV; Data Port: ±2kV
 - IEC61000-4-5 (Surge): Power Port: ±2kV/DM, ±4kV/CM; Data Port: ±2kV
 - IEC61000-4-6 (CS): 3V (10kHz-150kHz); 10V (150kHz-80MHz)
 - IEC61000-4-16 (Common mode conduction): 30V (cont.), 300V (1s)
- Shock: IEC 60068-2-27
- Free Fall: IEC 60068-2-32
- Vibration: IEC 60068-2-6

Warranty

- 5 years

>> Mechanical Drawing

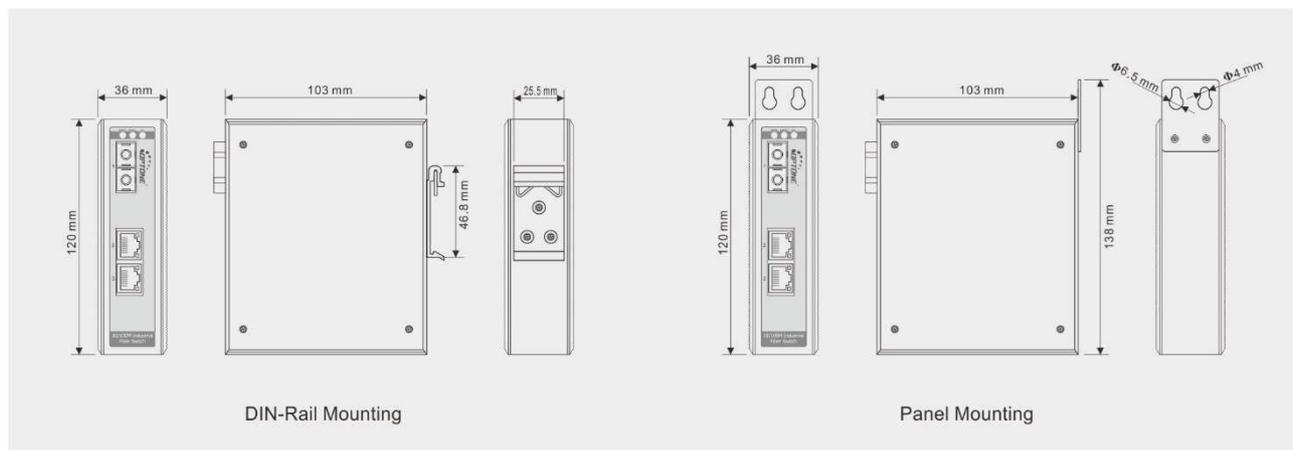



>>Ordering Information

Double Fiber

OPT-IES1012PM02	100Base-Fx to 2*10/100Base-Tx+PoE(PSE), Multi mode, 2Km, SC/ST optional
OPT-IES1012PS20	100Base-Fx to 2*10/100Base-Tx+PoE(PSE), Single mode, 20Km, SC/ST optional

Single Fiber

OPT-IES1012PW20	100Base-Fx to 2*10/100Base-Tx+PoE(PSE), Bi-Directional, 20Km, SC/ST optional
-----------------	--

>>Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by OPTONE before they become applicable to any particular order or contract. In accordance with the OPTONE policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of OPTONE or others. Further details are available from any OPTONE sales representative.

sales@optone.net
<http://www.optone.net>