



# TSW202


v1.3

Ensured by PROFINET




## HARDWARE


### FRONT VIEW

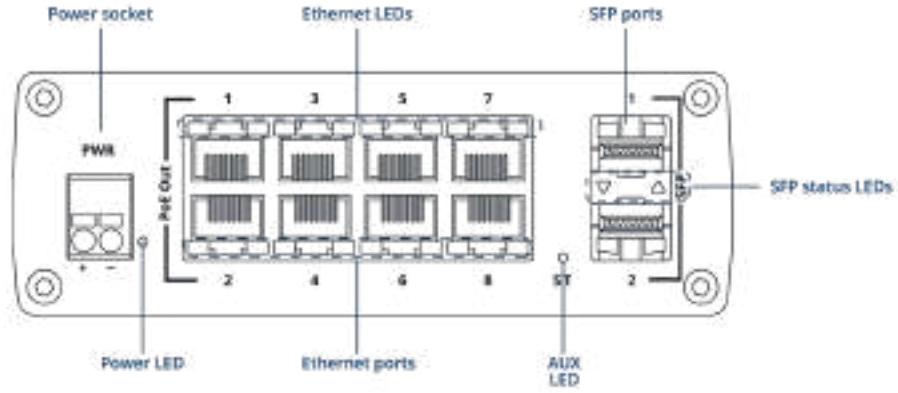

### BACK VIEW

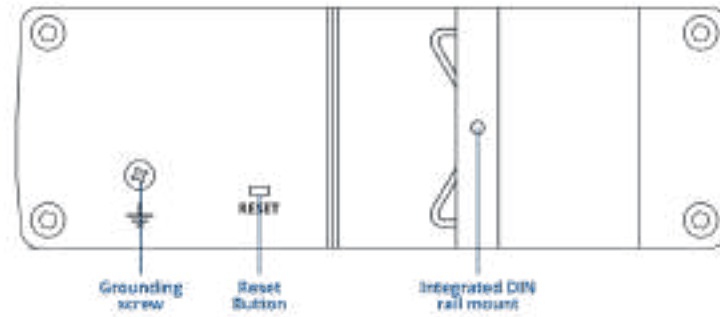

### POWER SOCKET PINOUT

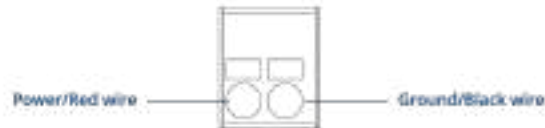

### RJ45 LED MEANING



SFP LED MEANING



## FEATURES

### Ethernet

<b>ETH</b>	Multi-layer managed 8 x ETH ports, 10/100/1000 Mbps supports auto MDI/MDIX crossover
------------	--

<b>Fibre</b>	2 x SFP ports
--------------	---------------

<b>IEEE 802.3 series standards</b>	802.3i, 802.3u, 802.3ab, 802.3x, 802.3az
------------------------------------	--

### INDUSTRIAL PROTOCOLS

<b>Profinet</b>	Profinet Class B conformance (available with optional order code)
-----------------	---

### POE OUT

<b>PoE+ ports</b>	Port 1 - 8
-------------------	------------

<b>PoE standards</b>	IEEE 802.3af (PoE, Type 1) and IEEE 802.3at (PoE+, Type 2), Alternative A (Batch 15 and all batches from Batch 17 onward) IEEE 802.3af (PoE, Type 1) and IEEE 802.3at (PoE+, Type 2), Alternative B (Batches 1-14 and Batch 16)
----------------------	--

<b>PoE Max Power per Port (at PSE)</b>	30 W
--	------

<b>Total PoE Power Budget (at PSE)</b>	240 W
--	-------

<b>Maximum Ethernet cable length</b>	100 m
--------------------------------------	-------

### Services

<b>EtherNet/IP</b>	Yes
--------------------	-----

<b>SNMP V2, V3</b>	Yes
--------------------	-----

<b>LLDP</b>	Yes
-------------	-----

<b>Network Management</b>	802.1p class of service, 802.1x port-based network access control, 802.1Q VLAN
---------------------------	--

### Network

<b>MRP</b>	MRP client role, MRP manager role
------------	-----------------------------------

<b>L2 features</b>	Loop protection, Forwarding table, VLAN, STP/RSTP
--------------------	---

<b>DHCP</b>	DHCP server, DHCP client, DHCP static leases capable of using MAC with wildcards
-------------	--

<b>Port Settings</b>	Enable/disable, link speed control, port isolation, PoE Management, EEE (802.3az) management, Port Mirroring
----------------------	--

<b>L3 Features</b>	Static IPv4 routing, static IPv6 routing, DHCPv6 client, static IPv6 address
--------------------	--

## Security

<b>Authentication</b>	PAM — preshared key, Radius & TACACS+, IP & login attempts block
<b>MAC filtering support</b>	Allow specific MAC addresses to connect through specified ports, ignore unauthorized or disable the port if an unauthorized MAC address is detected

## QoS

<b>QOS</b>	Port priority, DSCP priority, 802.1p priority, TOS
<b>Scheduling method</b>	SP/WFQ/WRR
<b>Bandwidth control</b>	Rate limiting, storm control
<b>Traffic Shaper</b>	Port-based shaping

## Diagnostics

<b>Tools</b>	Cable diagnostic, ping, traceroute, nslookup
<b>Ping reboot</b>	Capability to restart PoE in a specific port

## API

<b>Teltonika Networks Web API (beta) support</b>	Expand your device's possibilities by using a set of configurable API endpoints to retrieve or change data. For more information, please refer to this documentation: <a href="https://developers.teltonika-networks.com">https://developers.teltonika-networks.com</a>
--	---

## System Characteristics

<b>RAM</b>	128MB, DDR3
<b>FLASH storage</b>	16 MB serial flash

## Firmware / Configuration

<b>WEB UI</b>	Update FW from file, check FW on server, configuration profiles, configuration backup
<b>FOTA</b>	Update FW
<b>RMS</b>	Update FW/configuration for multiple devices at once
<b>Keep settings</b>	Update FW without losing current configuration

## FIRMWARE CUSTOMISATION

<b>Operating system</b>	TSWOS (OpenWrt based Linux OS)
<b>Supported languages</b>	Busybox shell, Lua, C, C++
<b>Development tools</b>	SDK package with build environment provided

### Performance Specifications

<b>Bandwidth (Non-blocking)</b>	20 Gbps
<b>Forwarding rate</b>	14.88 Mpps
<b>Packet buffer</b>	512 KB
<b>MAC address table size</b>	8K entries
<b>Jumbo frame support</b>	10000 bytes

### Power

<b>Connector</b>	2-pin industrial DC power socket
<b>Input voltage range</b>	7 – 57 VDC
<b>PoE-Out input voltage range</b>	44 – 57 VDC
<b>Power consumption</b>	Idle: < 3 W / Max: 8 W / PoE Max: 248 W

### Physical Interfaces

<b>Ethernet</b>	8 x RJ45 ports, 10/100/1000 Mbps
<b>Fibre</b>	2 x SFP ports
<b>Status LEDs</b>	1 x Power LED, 1 x Aux LED, 16 x ETH status LEDs, 2 x SFP status LEDs
<b>Power</b>	1 x 2-pin industrial DC power socket
<b>Reset</b>	Software reset button
<b>Other</b>	1 x Grounding screw

### Physical Specification

<b>Casing material</b>	Anodized aluminum housing and panels
<b>Dimensions (W x H x D)</b>	132 x 44.2 x 122.2 mm
<b>Weight</b>	610 g
<b>Mounting options</b>	Integrated DIN rail bracket; wall mount and flat surface (additional kit needed)

### Operating Environment

<b>Operating temperature</b>	-40 °C to 75 °C
<b>Operating humidity</b>	5% to 95% non-condensing
<b>Ingress Protection Rating</b>	IP30

**Regulatory & Type Approvals**


---

**Regulatory** CE, UKCA, RCM, ANRT, FCC, IC, CB, NBTC, PROFINET, CITC, RoHS, REACH, WEEE, SDPPI (POSTEL), JATE, Kenya, ICASA, Giteki, UL Safety

**EMC Emissions & Immunity**


---

**Standards** EN 55032:2015 + A1:2020 + A1:2020  
 EN 55035:2017 + A1:2020  
 EN IEC 61000-3-2: 2019 + A1:2021  
 EN 61000-3-3: 2013 + A1:2019 + A2:2021

**ESD** EN 61000-4-2:2009

**Radiated Immunity** EN IEC 61000-4-3:2020

**EFT** EN 61000-4-4:2012

**Surge Immunity (AC Mains Power Port)** EN 61000-4-5:2014 + A1:2017

**CS** EN 61000-4-6:2014

**DIP** EN 61000-4-11:2020

**Safety**


---

**Standards** **CE:** EN IEC 62368-1:2020 + A1:2020  
**RCM:** AS/NZS 62368.1:2022  
**CB:** IEC 62368-1:2018

**Safety (Ordinary Locations)**


---

**Standards** UL/CSA Safety: UL 62368-1 (3rd Ed., Rev. December 13, 2019), C22.2 No. 62368-1:19 (3rd Ed., Rev. December 13, 2019)

## ORDERING

### STANDARD PACKAGE\*



- TSW202
- QSG (Quick Start Guide)
- Packaging box

\*Standard package contents may differ based on standard order codes.

For more information on all available packaging options – please [contact us](#) directly.

### CLASSIFICATION CODES

**HS Code:** 851762

**HTS:** 8517.62.00

### AVAILABLE VERSIONS

TSW202 *****0	N/A	TSW202000000 / Standard package
<b>PROFINET disabled by default</b>		TSW202000040 / Standard package with US PSU without connector
TSW202 *****1	N/A	TSW202000001 / Standard package
<b>Profinet Class B conformance</b>		

For more information on all available packaging options – please [contact us](#) directly.

## TSW202 SPATIAL MEASUREMENTS

**PHYSICAL SPECIFICATION**


**Device housing (W x H x D):** 132 x 44.2 x 122.2 mm

**Box (W x H x D):** 125 x 136x 47 mm

\*Housing measurements are presented without antenna connectors and screws; for measurements of other device elements look to the sections below.


**TOP VIEW**

The figure below depicts the measurements of device and its components as seen from the top:

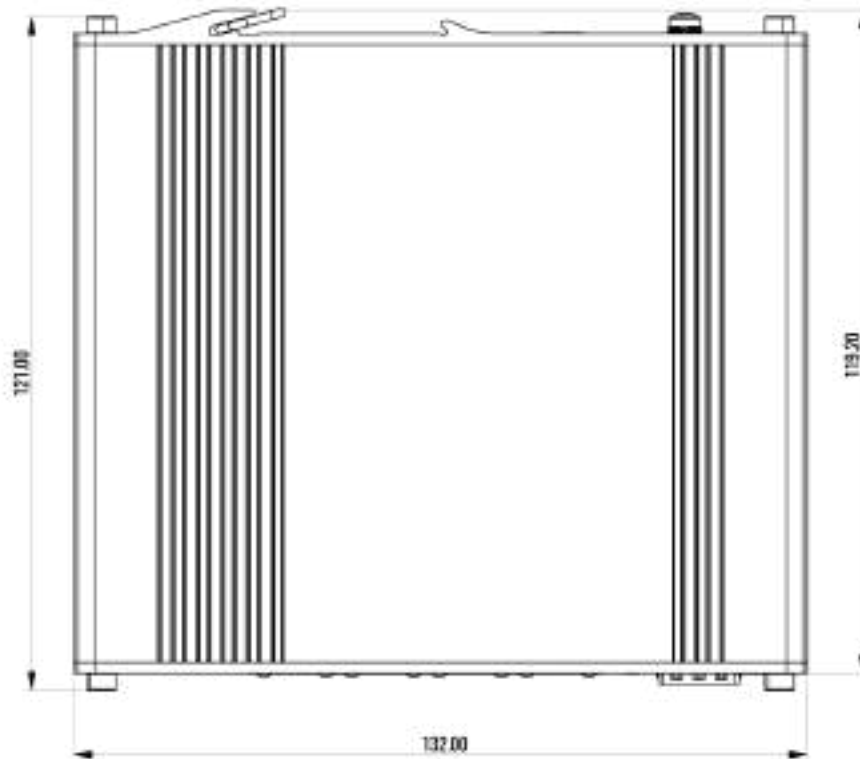


**RIGHT VIEW**

The figure below depicts the measurements of device and its components as seen from the right:

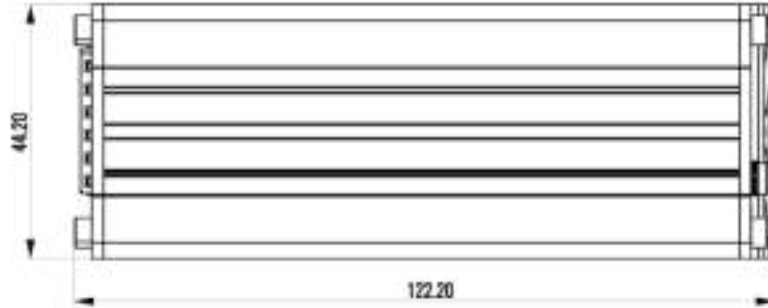


**REAR VIEW**

The figure below depicts the measurements of device and its components as seen from the back panel side:

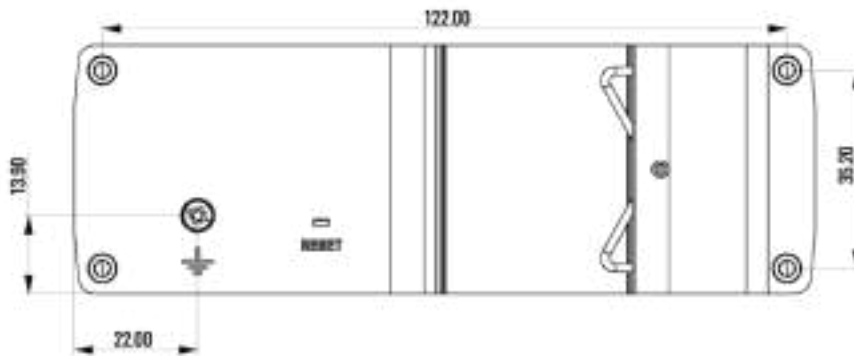

**FRONT VIEW**

The figure below depicts the measurements of device and its components as seen from the front panel side:

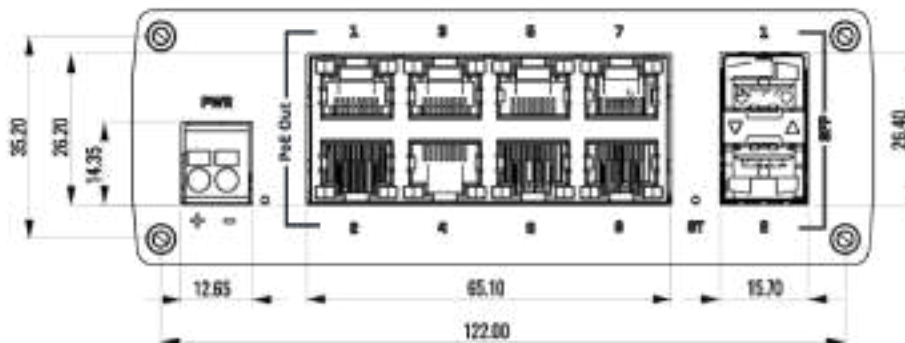

**MOUNTING SPACE REQUIREMENTS**

The figure below depicts an approximation of the device's dimensions when cables and antennas are attached:

