

A Series Remote I/O Modules

USER GUIDE

A-1057/A-1058/A-1068/A-1069/A-1055/A-1055S/A-1051/A-1060

OVERVIEW

- ▲ RS-485 Interface
- ▲ Supports Modbus RTU / ASCII
- ▲ LED Indicators
- ▲ Isolation voltage: 5000 V DC
- ▲ Wide operation temperature : -20 ~ +75 °C
- ▲ Dual watchdog timer
- ▲ Surge , EFT and ESD protection
- ▲ Free PC software “Yotta Utility”

Technical specifications

Type	A-1057	A-1058	A-1068	A-1069	A-1051	A-1055	A-1055S	A-1060
Output	12	12	8	8	--	8	8	4
Input	--				16	8	8	8
Power Consumption	Nearly 24VDC 0.96W	Nearly 24VDC 0.96W	Nearly 24VDC 1.68W	Nearly 24VDC 2.88W	Nearly 24VDC 1.66W	Nearly 24VDC 1.28W	Nearly 24VDC 1.28W	Nearly 24VDC 2.26W
Input Power	+10 ~ +30 VDC							
Output Type	Source	Sink	Signal Relay	Power Relay	--	Sink	Source	Power Relay
Input Type	--				Isolated Digital			
Output Rating(max)	10 – 35 VDC/1A	40VDC /200mA	120VAC /0.5A 30VDC/1A	250VAC /5A 30VDC/1A	--	40VDC /200mA	10- 35VDC/1A	250VAC /5A 30VDC/1A
Input Rating (Isolation)	--				- Logic level 0: +1 V max. - Logic level 1: +3.5 ~ 30 V			
Isolation Voltage	5000 V DC							
LED	Yes							
Modbus Support	Modbus RTU + Modbus ASCII							
Watchdog Timer	System m & Comm.							

For further information, please visit : www.yottacontrol.com/rm

A Series Remote I/O Modules

USER GUIDE

A-1057/A-1058/A-1068/A-1069/A-1055/A-1055S/A-1051/A-1060

OVERVIEW

- ▲ RS-485 Interface
- ▲ Supports Modbus RTU / ASCII
- ▲ LED Indicators
- ▲ Isolation voltage: 5000 V DC
- ▲ Wide operation temperature : -20 ~ +75 °C
- ▲ Dual watchdog timer
- ▲ Surge , EFT and ESD protection
- ▲ Free PC software “Yotta Utility”

Technical specifications

Type	A-1057	A-1058	A-1068	A-1069	A-1051	A-1055	A-1055S	A-1060
Output	12	12	8	8	--	8	8	4
Input	--				16	8	8	8
Power Consumption	Nearly 24VDC 0.96W	Nearly 24VDC 0.96W	Nearly 24VDC 1.68W	Nearly 24VDC 2.88W	Nearly 24VDC 1.66W	Nearly 24VDC 1.28W	Nearly 24VDC 1.28W	Nearly 24VDC 2.26W
Input Power	+10 ~ +30 VDC							
Output Type	Source	Sink	Signal Relay	Power Relay	--	Sink	Source	Power Relay
Input Type	--				Isolated Digital			
Output Rating(max)	10 – 35 VDC/1A	40VDC /200mA	120VAC /0.5A 30VDC/1A	250VAC /5A 30VDC/1A	--	40VDC /200mA	10- 35VDC/1A	250VAC /5A 30VDC/1A
Input Rating (Isolation)	--				- Logic level 0: +1 V max. - Logic level 1: +3.5 ~ 30 V			
Isolation Voltage	5000 V DC							
LED	Yes							
Modbus Support	Modbus RTU + Modbus ASCII							
Watchdog Timer	System m & Comm.							

For further information, please visit : www.yottacontrol.com/rm


A Series Remote I/O Modules

USER GUIDE

A-1057/A-1058/A-1068/A-1069/A-1055/A-1055S/A-1051/A-1060

	A-1057/58	A-1068/69		A-1057/58	A-1068	A-1069
Item	Pin Assignment		Item	Pin Assignment		
1	DO7~9 COM	RL5 NO	14	DO0~2 COM	RL0 NO	RL0 NO
2	DO7	RL5 COM	15	DO0	RL0 COM	RL0 COM
3	DO8	RL5 NC	16	DO1	RL0 NC	NC
4	DO9	RL6 NO	17	DO2	RL1 NO	RL1 NO
5	DO7~0 GND	RL6 COM	18	DO0~2 GND	RL1 COM	RL1 COM
6	DO10~11 COM	RL6 NC	19	DO3~4 COM	RL1 NC	NC
7	DO10	RL7 NO	20	DO3	RL2 NO	RL2 NO
8	DO11	RL7 COM	21	DO4	RL2 COM	RL2 COM
9	DO10~11 GND	RL7 NC	22	DO3~4 GND	RL2 NC	RL3 NO
10	(Y)DATA+	(Y)DATA+	23	DO5~6 COM	RL3 COM	RL3 COM
11	(G)DATA-	(G)DATA-	24	DO5	RL3 NO	NC
12	(R)+VS	(R)+VS	25	DO6	RL4 COM	RL4 NO
13	(B)GND	(B)GND	26	DO5~6 GND	RL4 NO	RL4 COM

	A-1051	A-1060/55/55S		A-1051	A-1060	A-1055/55S
Item	Pin Assignment		Item	Pin Assignment		
1	DI9~11COM	DI0~71COM	14	DI0~2COM	RL0 NO	DO0~3COM
2	DI9	DI0	15	DI0	RL0 COM	DO0
3	DI10	DI1	16	DI1	RL0 NC	DO1
4	DI11	DI2	17	DI2~3COM	RL1 NO	DO2
5	DI12~15 COM	DI3	18	DI2	RL1 COM	DO3
6	DI12	DI4	19	DI3	RL1 NC	DO0~3GND
7	DI13	DI5	20	DI4~5COM	NC	NC
8	DI14	DI6	21	DI4	RL2 NO	DO4~7COM
9	DI15	DI7	22	DI5	RL2 COM	DO4
10	(Y)DATA+	(Y)DATA+	23	DI6~8COM	RL2 NC	DO5
11	(G)DATA-	(G)DATA-	24	DI6	RL3 NO	DO6
12	(R)+VS	(R)+VS	25	DI7	RL3 COM	DO7
13	(B)GND	(B)GND	26	DI8	RL3 NC	DO4~7GND

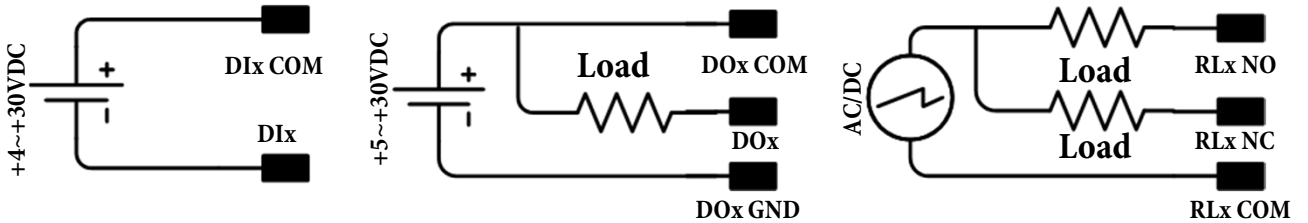

For further information, please visit : www.yottacontrol.com/rm


A Series Remote I/O Modules

USER GUIDE

A-1057/A-1058/A-1068/A-1069/A-1055/A-1055S/A-1051/A-1060

	A-1057/58		A-1068/69		A-1057/58		A-1068	A-1069
Item	Pin Assignment			Item	Pin Assignment			
1	DO7~9 COM	RL5 NO		14	DO0~2 COM	RL0 NO		RL0 NO
2	DO7	RL5 COM		15	DO0	RL0 COM		RL0 COM
3	DO8	RL5 NC		16	DO1	RL0 NC		NC
4	DO9	RL6 NO		17	DO2	RL1 NO		RL1 NO
5	DO7~0 GND	RL6 COM		18	DO0~2 GND	RL1 COM		RL1 COM
6	DO10~11 COM	RL6 NC		19	DO3~4 COM	RL1 NC		NC
7	DO10	RL7 NO		20	DO3	RL2 NO		RL2 NO
8	DO11	RL7 COM		21	DO4	RL2 COM		RL2 COM
9	DO10~11 GND	RL7 NC		22	DO3~4 GND	RL2 NC		RL3 NO
10	(Y)DATA+	(Y)DATA+		23	DO5~6 COM	RL3 COM		RL3 COM
11	(G)DATA-	(G)DATA-		24	DO5	RL3 NO		NC
12	(R)+VS	(R)+VS		25	DO6	RL4 COM		RL4 NO
13	(B)GND	(B)GND		26	DO5~6 GND	RL4 NO		RL4 COM

	A-1051		A-1060/55/55S		A-1051		A-1060	A-1055/55S
Item	Pin Assignment			Item	Pin Assignment			
1	DI9~11COM	DI0~71COM		14	DI0~2COM	RL0 NO		DO0~3COM
2	DI9	DI0		15	DI0	RL0 COM		DO0
3	DI10	DI1		16	DI1	RL0 NC		DO1
4	DI11	DI2		17	DI2~3COM	RL1 NO		DO2
5	DI12~15 COM	DI3		18	DI2	RL1 COM		DO3
6	DI12	DI4		19	DI3	RL1 NC		DO0~3GND
7	DI13	DI5		20	DI4~5COM	NC		NC
8	DI14	DI6		21	DI4	RL2 NO		DO4~7COM
9	DI15	DI7		22	DI5	RL2 COM		DO4
10	(Y)DATA+	(Y)DATA+		23	DI6~8COM	RL2 NC		DO5
11	(G)DATA-	(G)DATA-		24	DI6	RL3 NO		DO6
12	(R)+VS	(R)+VS		25	DI7	RL3 COM		DO7
13	(B)GND	(B)GND		26	DI8	RL3 NC		DO4~7GND

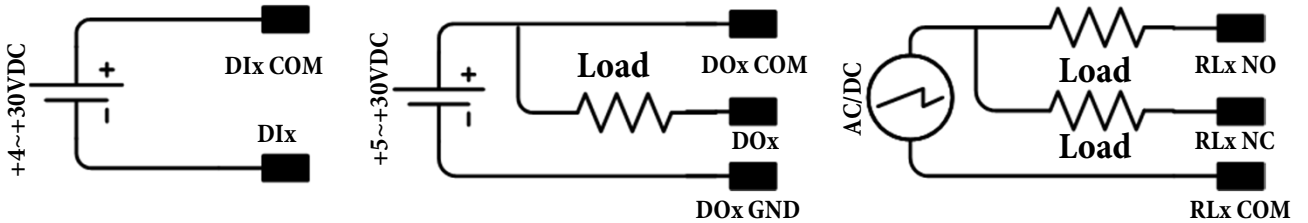

For further information, please visit : www.yottacontrol.com/rm