


ADAM-4017+ ADAM-4018+ ADAM-4019+

8-ch Analog Input Module with Modbus
8-ch Thermocouple Input Module with Modbus
8-ch Universal Analog Input Module with Modbus

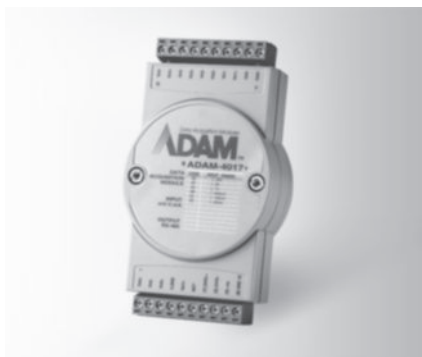

ADAM-4017+

FCC CE RoHS US
2002/95/EC 2006/66/EC ENEC

Specifications

General

- Power Consumption 1.2 W @ 24 V_{DC}
- Watchdog Timer System (1.6 second) & Communication
- Supported Protocols ASCII command and Modbus/RTU

Analog Input

- Channels 8 differential
- Channel Independent Configuration Yes
- Input Impedance Voltage: 20 M Ω
Current: 120 Ω
- Input Type mV, V, mA
- Input Range ± 150 mV, ± 500 mV, ± 1 V,
 ± 5 V, ± 10 V, ± 20 mA,
4 ~ 20 mA



ADAM-4018+

FCC CE RoHS US
2002/95/EC 2006/66/EC ENEC

Specifications

General

- Power Consumption 0.8 W @ 24 V_{DC}
- Watchdog Timer System (1.6 second) & Communication
- Supported Protocols ASCII command and Modbus/RTU

Analog Input

- Channels 8 differential
- Channel Independent Configuration Yes
- Input Impedance Voltage: 20 M Ω
Current: 120 Ω
- Input Type Thermocouple, mA
- Input Range ± 20 mA, 4 ~ 20 mA
- T/C Types and Temperature Ranges

J	0 ~ 760°C	R	500 ~ 1,750°C
K	0 ~ 1,370°C	S	500 ~ 1,750°C
T	-100 ~ 400°C	B	500 ~ 1,800°C
E	0 ~ 1,000°C		

- Burn-out Detection All T/C



ADAM-4019+

FCC CE RoHS US
2002/95/EC 2006/66/EC ENEC

Specifications

General

- Power Consumption 1.0 W @ 24 V_{DC}
- Watchdog Timer System (1.6 second) & Communication
- Supported Protocols ASCII command and Modbus/RTU

Analog Input

- Channels 8 differential channels for individual input type
- Channel Independent Configuration Yes
- Input Impedance Voltage: 20 M Ω
Current: 120 Ω
- Input Type T/C, mV, V, mA
- Input Range ± 1 V, ± 2.5 V, ± 5 V,
 ± 10 V, ± 100 mV,
 ± 500 mV, ± 20 mA,
4 ~ 20 mA

T/C Types and Temperature Ranges

J	0 ~ 760°C	R	500 ~ 1,750°C
K	0 ~ 1,370°C	S	500 ~ 1,750°C
T	-100 ~ 400°C	B	500 ~ 1,800°C
E	0 ~ 1,000°C		

- Burn-out Detection 4 ~ 20 mA & all T/C

Common Specifications

General

- Power Input Unregulated 10 ~ 30 V_{DC}
- Connectors 2 x plug-in terminal block (#14 ~ 22 AWG)

Analog Input

- Accuracy Voltage mode: $\pm 0.1\%$ or better
Current mode: $\pm 0.2\%$ or better
- Resolution 16-bit
- Sampling Rate 10 sample/second (total)
- Isolation Voltage 3,000 V_{DC}

- Overvoltage Protection ± 35 V_{DC}
- CMR @ 50/60 Hz 120 dB
- NMR @ 50/60 Hz 100 dB
- Span Drift ± 25 ppm/ $^{\circ}$ C (Typical)
- Zero Drift ± 6 μ V/ $^{\circ}$ C
- Built-in TVS/ESD Protection

Environment

- Operating Humidity 5 ~ 95% RH
- Operating Temperature -10 ~ 70 $^{\circ}$ C
(14 ~ 158 $^{\circ}$ F)
- Storage Temperature -25 ~ 85 $^{\circ}$ C
(-13 ~ 185 $^{\circ}$ F)

Ordering Information

- ADAM-4017+ 8-ch Analog Input Module with Modbus
- ADAM-4018+ 8-ch Thermocouple Input Module w/Modbus
- ADAM-4019+ 8-ch Universal Analog Input Module w/Modbus