


ITEM	ABS Box PLC Splitter
MODEL NO.	PLC-A-164
DESCRIPTION	1*64 ABS Box PLC Splitter
	

Overview

The AOA single-mode Planar Lightwave Circuit Splitter (PLCS) are developed based on unique silica glass waveguide process with reliable precision aligned fiber pigtail in a miniature package, it provides a low cost light distribution solution with small form factor and high reliability.

The 1x64 PLC Splitter devices have high performance in terms of low insertion loss, low PDL, high return loss and excellent uniformity over a wide wavelength range from 1260nm to 1620nm and working in temperature from -40°C to +80°C. The PLC Optical Splitters have standard configurations of 1x4, 1x8, 1x16 and 1x32 configurations, as well as customized structures of 2x8, 2x16, 2x32.

Features

- Compact design
- Low insertion loss and low PDL
- High reliability
- High channel counts
- Wide wavelength range
- Large operating temperature range

Application


- FTTx Systems
- LAN, WAN and Metro Networks
- Analog/Digital Passive Optical Networks
- CATV Networks
- Other applications in fiber optic systems

Technical Indexes

Parameters	Specifications
Channel Number	1x64
Operating Wavelength (nm)	1260~1650
Insertion Loss (dB)	without connector ≤ 20.3 ; with connector ≤ 20.5
Loss Uniformity (dB)	≤ 2.0
Polarization Dependent Loss (dB)	≤ 0.4
Return Loss (dB)	UPC ≥ 50 ; APC ≥ 55
Directivity (dB)	≥ 55
Package Dimension (mm)	141×115×18
Operating Temperature (°C)	-40~85
Storage Temperature (°C)	-40~85

Specifications may change without notice

Dimension

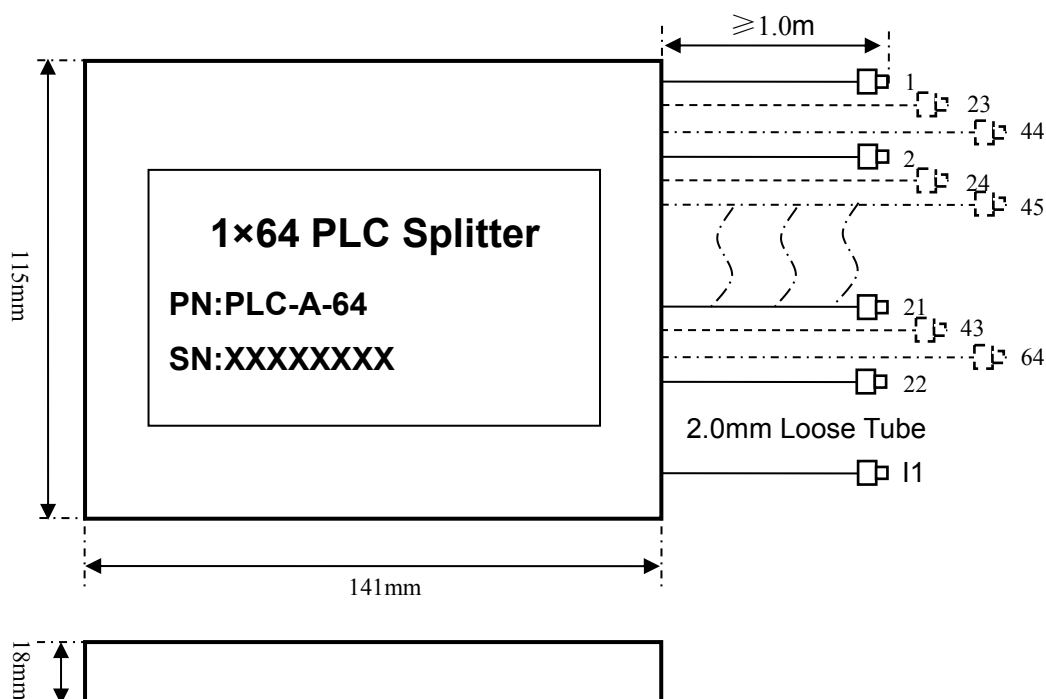

Ordering Information

Technology	Package	Port	Fiber Type	Input Pigtail	Fiber Length	In/Out Connector
PLC	<input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	B=Bare Fiber	102=1x2	1=G652D	1=Bare Fiber	1=1M	0=Without Connector
	S=Steel Type	104=1x4	2=G657A	2=900μm jacket fiber	2=1.2M	1=SC/PC
	A=ABS Box	108=1x8	C=Customized	3=2.0 jacket fiber	3=1.5M	2=SC/APC
	M=Modular	116=1x16		4=3.0 jacket fiber	C=Customized	3=FC/PC
	R=Rack-Mounted	132=1x32				4=FC/APC
	C=Customized	164=1x64				5=LC/UPC
		202=2x2				6=LC/APC
		204=2x4				C=Customized
		208=2x8				
		216=2x16				
		232=2x32				
		264=2x64				

Example: PLC-A-104-2-4-1-1: ABS Box Type 1x4 G657A 3.0mm 1M SC/UPC