

Features

- True Motionnet Star Wiring Hub
- Independent Motionnet transceiver for each channel
- Maximum communication speed: 20 Mbps
- LEDs for indicating each Motionnet activity
- RJ-45 jack for standard module while the EC module equipped with Mini-Clamp connector
- DIN-Rail Mounting




MN-HUB4 / MN-HUB4EC

Distributed Motionnet 4 Port Hub Module

Introduction

In some user's application, users may encounter some difficulty in wiring since the standard Motionnet only support daisy-chain topology. The **MN-HUB4** series modules can help users to use star or tree topology during wiring which not only can make the wiring more easier but also reduce the total wiring distance and cost.

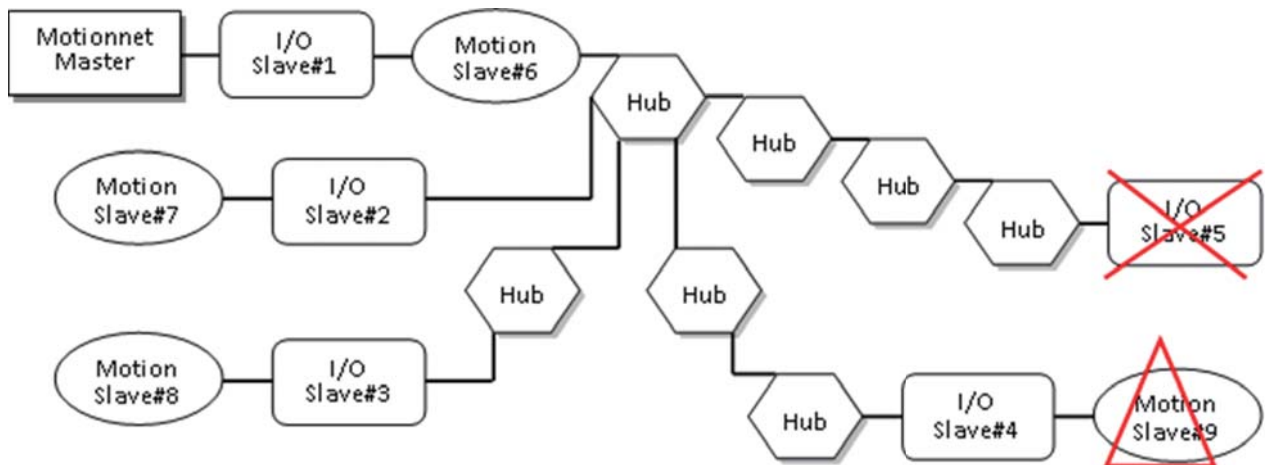


Module ID	No. of Layers to Master	Accessible	Module ID	No. of Layers to Master	Accessible
1 (I/O)	0	Yes	6 (Motion)	0	Yes
2 (I/O)	1	Yes	7 (Motion)	1	Yes
3 (I/O)	2	Yes	8 (Motion)	2	Yes
4 (I/O)	3	Yes	9 (Motion)	3	Yes
5 (I/O)	4	No			

Motion Modules	No. of Layers between Modules	Interpo-lation	Motion Modules	No. of Layers between Modules	Interpolation
6 and 7	1	Yes	7 and 8	2	Yes
6 and 8	2	Yes	7 and 9	3	No
6 and 9	3	No	8 and 9	4	No

Specifications

Model	MN-HUB4	MN-HUB4EC
Interface		
Communication Speed	2.5, 5, 10, 20 Mbps	
No. of Connection Line	Main Line (same layer): 2 Branch Line (to next layer): 4	
Communication Distance	100 M Max. (20 Mbps; up to 32 modules) 50 M Max. (20 Mbps; up to 64 modules) 100 M Max. (10 Mbps; up to 64 modules)	
Layers between Modules	I/O or independent axis: 3 (Max.) Between two interpolation axes: 2 (Max.)	
Power		
Voltage Range	12 - 24 V	
Environmental		
Operating Temperature	0 ~ + 60°C	
Storage Temperature	-20 ~ +80°C	
Operating Humidity	10 ~ 85%; Non-condensing	
Storage Humidity	5 ~ 95%; Non-condensing	

Dimensions: (Units: mm)

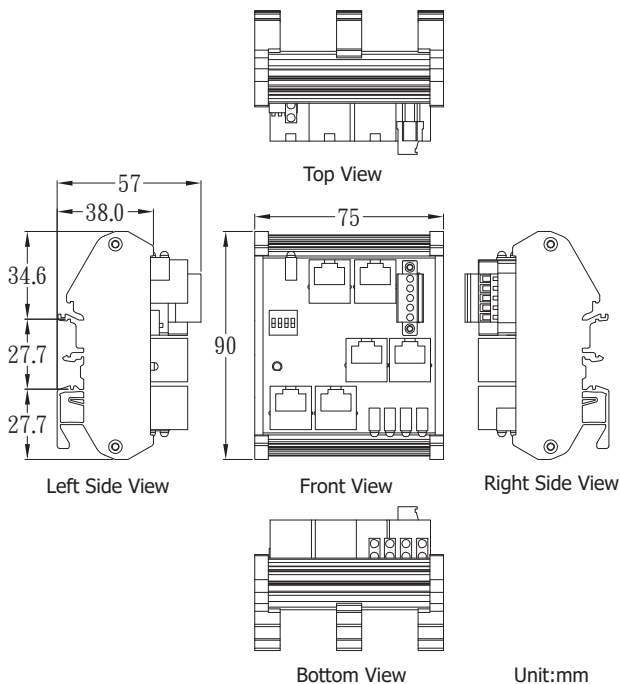

Ordering Information

MN-HUB4 CR	Distributed Motionnet 4 port Hub module (with RJ-45 Jack)
MN-HUB4EC CR	Distributed Motionnet 4 port Hub module (with e-CON Mini-Clamp connector)
MN-HUB4EC-R CR	Distributed Motionnet 4 port Hub module and 6 "4PKD1O0000002" Red e-CON Mini-Clamp connector

Related Products

PISO-MN200(T/EC) CR	PCI Bus, Dual-Line Motionnet Control Master Card (RoHS)
MN-SERVO Series CR	MN-SERVO-MJ3 / PA4 / YSV / DAA / TTA: Distributed Motionnet Single-axis Motion Control Modules (RoHS)
MN-SERVO -EC Series CR	Distributed Motionnet Single-axis Motion Control Module with e-CON Mini-Clamp connector (RoHS)
MN-3254(T) CR	Distributed Motionnet 16-ch Isolated DI, 16-ch Isolated DO Module (RoHS)
MN-3253(T) CR	Distributed Motionnet 32-ch Isolated DI Module (RoHS)
MN-3257(T) CR	Distributed Motionnet 32-ch Isolated DO Module (RoHS)

Accessories

Mini Clamp Wiremount Plug			Applicable Wire		
ICP DAS Part No.	Cover Color	3M Part No.	AWG No.	Cross-sectional Area (mm ²)	Finished External Diameter Φ (mm)
4PKD1O0000001	Gray	37103-2206-000FL	20 - 22	0.3 - 0.5	1.6 - 2.0
4PKD1O0000002	Red	37103-3101-000FL	24 - 26	0.14 - 0.3	0.8 - 1.0
4PKD1O0000003	Orange	37103-3163-000FL	24 - 26	0.14 - 0.3	1.2 - 1.6

